



Model Evaluation

David Choi, Darrell Sonntag, and James Warila

MOVES Review Work Group

March 1, 2017



Agenda

- Background on MOVES model evaluation
- Context of current MOVES evaluation
- MOVES2014a comparisons to
 - Inspection/Maintenance (I/M) & remote sensing data (RSD)
 - Tunnel studies
- Summary



MOVES Evaluation

- Why?
 - A key recommendation in the National Research Council's review of EPA's mobile source modeling program¹
 - A key element of EPA's quality assurance guidance for developing models²
 - A critical component of EPA's development and upkeep of MOVES
- Objectives
 - To assess model performance in accurately estimating current emission inventories and forecasting emission trends
 - To identify areas in clear need of improvement
 - To guide future work and research needs



MOVES Evaluation (cont'd)

- Priorities
 - Major sources of emissions (e.g., light-duty gasoline, heavy-duty diesel)
 - Areas where significant independent data/studies available
- Assessment
 - If systematic bias is observed across multiple data sources, it is indicative of model underperformance
 - If the model predictions are generally within the variability of independent measurements, it gives confidence that the model is predicting real-world emissions reasonably well
- Improper means of evaluation
 - Comparisons against measurements based only on a few vehicles
 - Not sufficiently customizing MOVES inputs to account for the measurement conditions (i.e., fleet composition, vehicle activity)



Types of Evaluation


- Emission rates
 - Using dynamometer, RSD, and PEMS measurements
 - Large samples with best chance to capture rare high emitters
 - Known operating conditions (i.e., pre-conditioned IM240 drive cycle)
 - Comparing MOVES predictions to such measurements is the most controlled comparison
 - Activity and fleet variables such as vehicle mix and vehicle age are known for a given study
 - Eliminates sources of significant variability inherent in comparisons to ambient monitor data, and even in tunnel and roadside measurements



Types of Evaluation (cont'd)

- “Localized composite” emissions
 - Using composite emission measurements from tunnel or roadside emission monitors where
 - Vehicle emissions are predominant
 - Vehicle activity and fleet mix can be accounted for to some degree
 - Provides a snapshot of overall model performance, for the narrow operating conditions represented at the specific location
- Regional air quality
 - Evaluation of air quality model results (CMAQ) vs. air quality monitor data
- “Macro-scale” fuel consumption
 - Comparison of “bottom-up” fuel consumption to “top-down” fuel tax data

Level of uncertainty

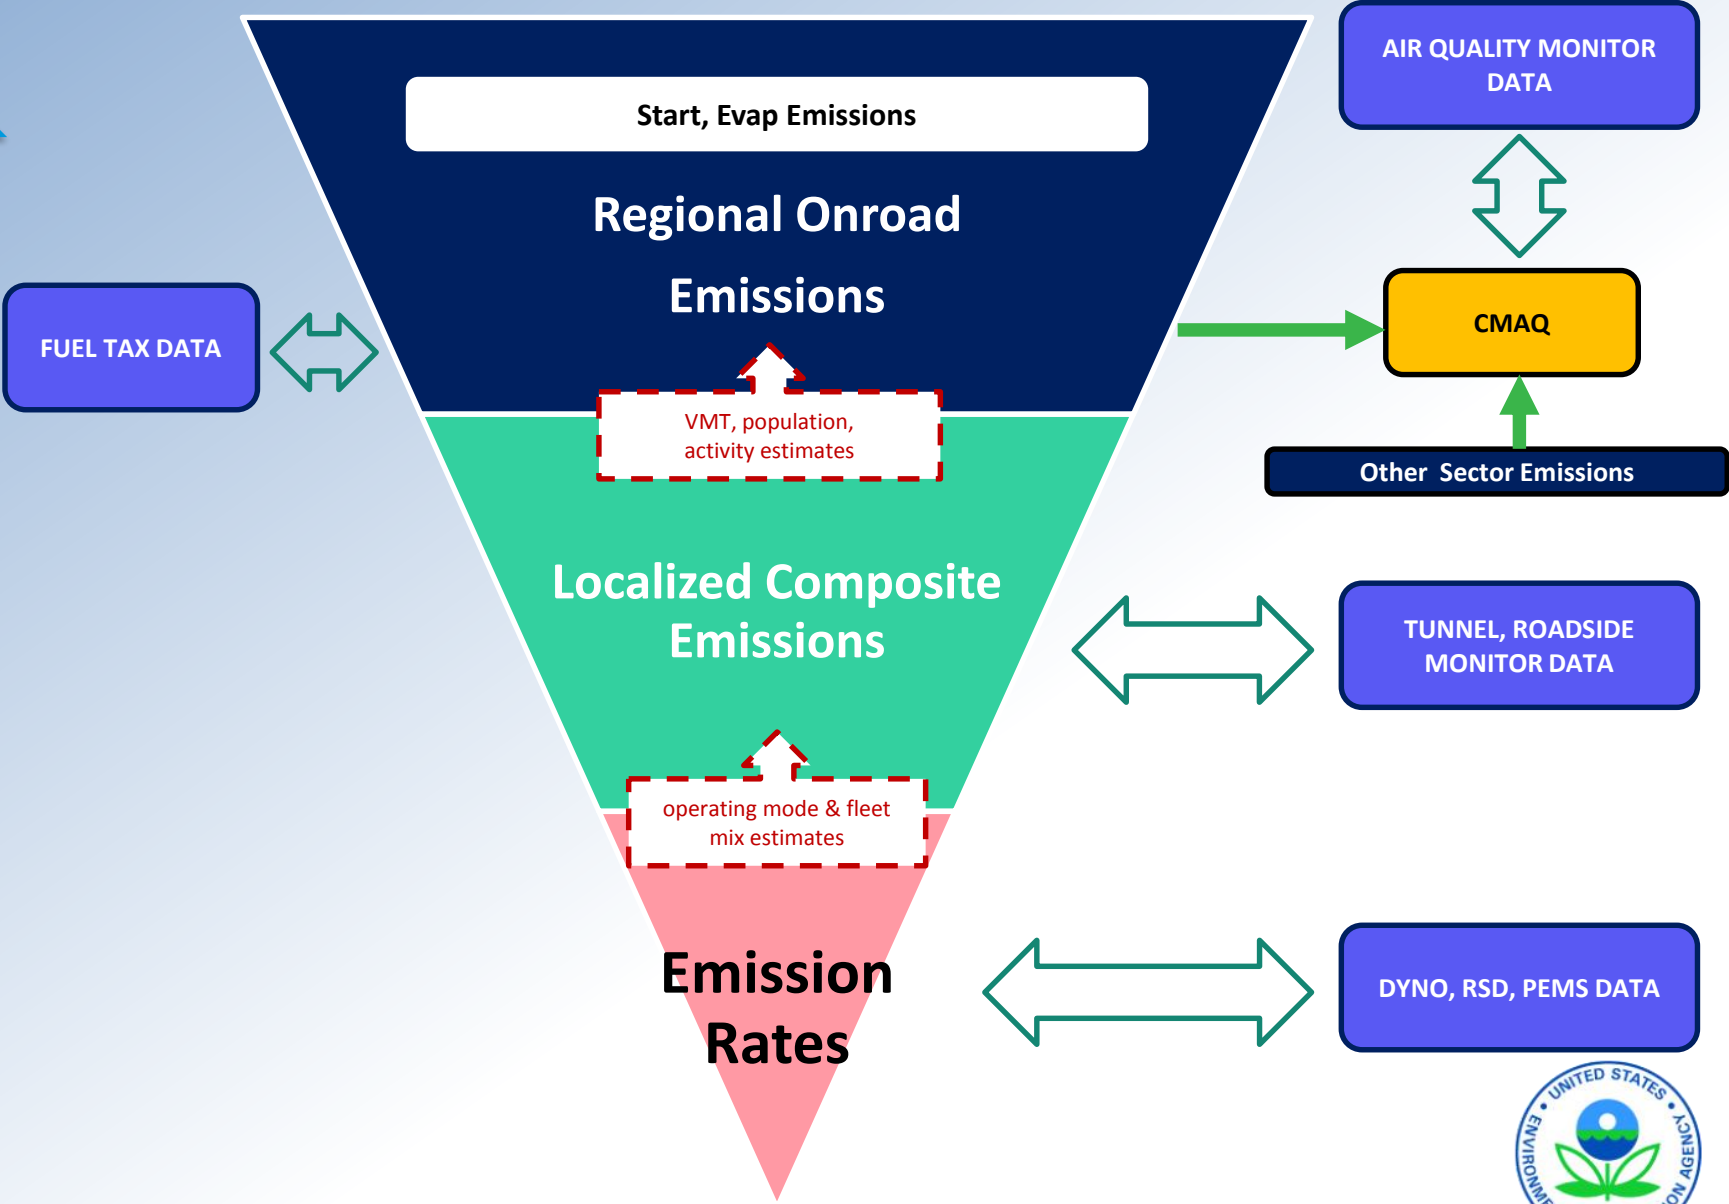

History

- EPA's evaluation work on MOVES began with MOVES2004, focused on fuel consumption
- For MOVES2010a, we evaluated model performance using several methods and found that:
 - Emission rate comparisons against multiple data showed no systematic bias for both light-duty and heavy-duty vehicles
 - Tunnel comparisons showed
 - MOVES predictions were higher than the observed for LD, but MOVES compared well for HD
 - MOVES trends over time are consistent with observations

Evaluation Type	Analysis	
Emission Rates	Light-Duty Atlanta RSD CRC E-23 Chicago RSD Chicago I/M Dyno Kansas City Study Dyno NCSU PEMS (NC State)	Heavy-Duty CRC E-55 Dyno HD in-use compliance Houston drayage
Localized Composite	Caldecott Tunnel - range analysis Van Nuys Tunnel (Fujita, et. al) Borman Expressway	
Fuel	FHWA Fuel Sales 2000-2007	




Current Context

- Several recent studies^{3,4} have shown differences between air quality model estimates and monitored values for nitrogen oxides suggesting AQ models appear to overestimate NO_x
- Staff across EPA are investigating various aspects of the issue



MOVES is just one complex part of the modeling system:

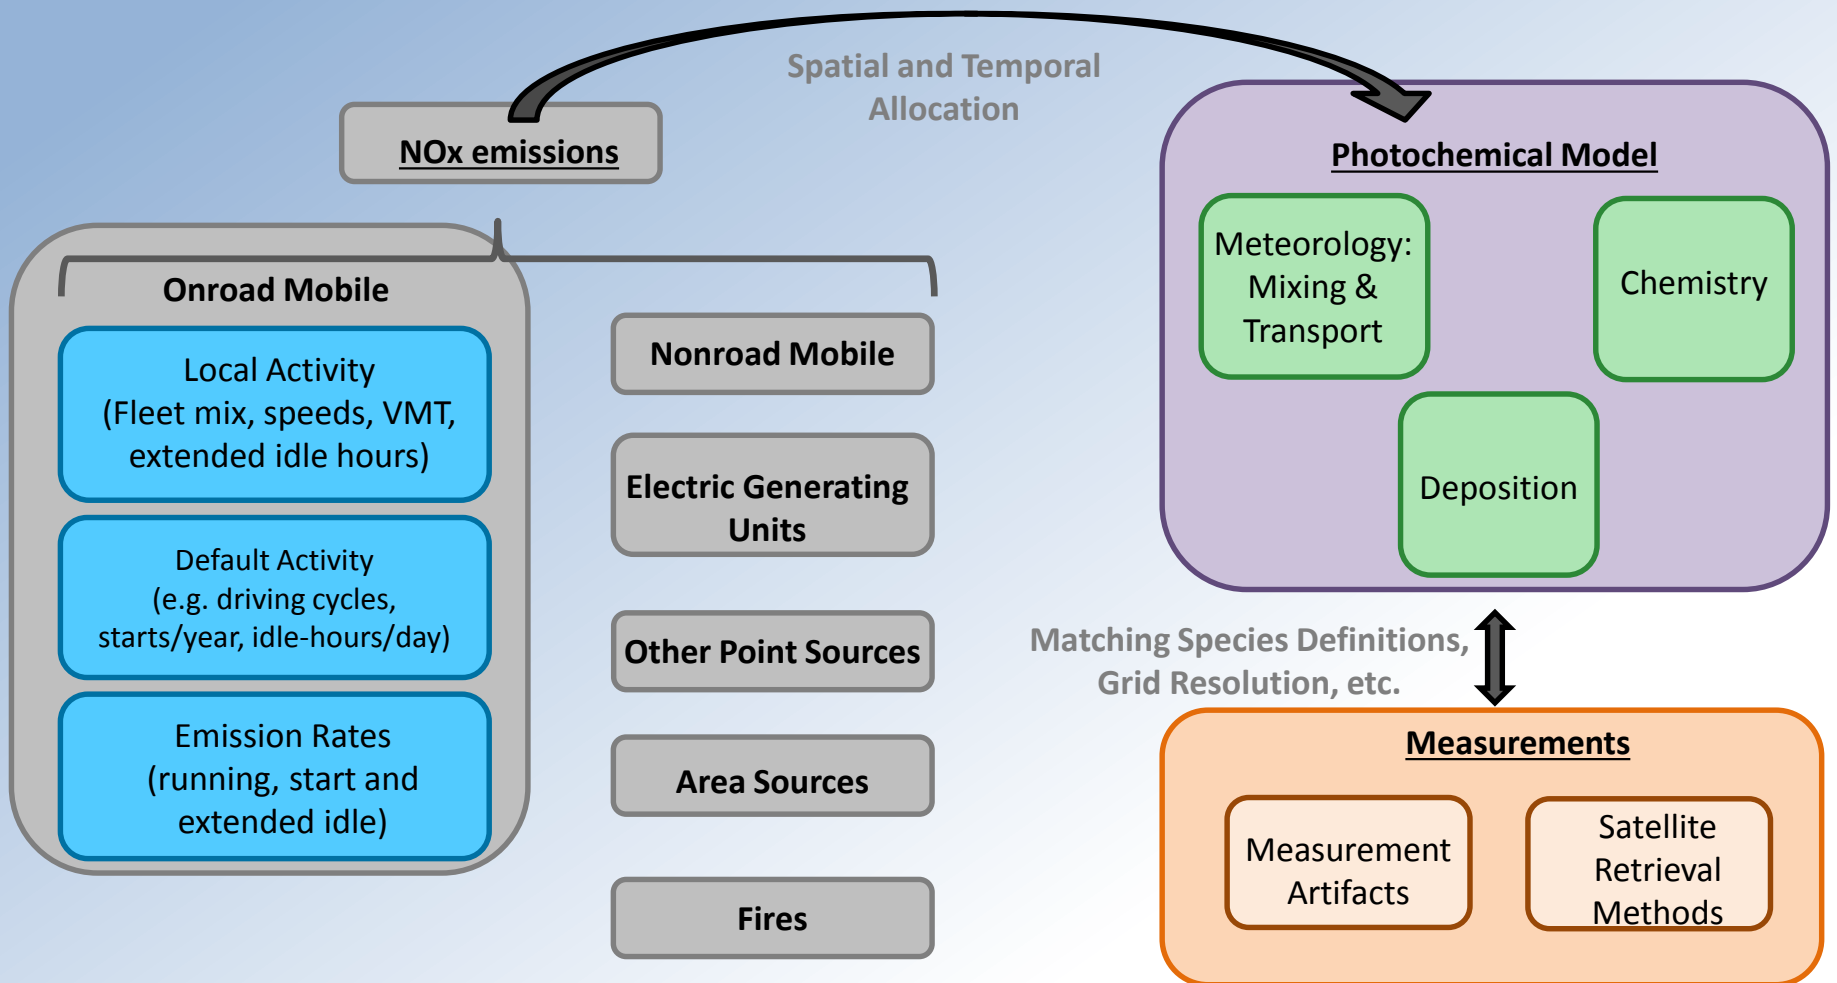

NOx Evaluation Efforts for MOVES2014a

- Focus on light-duty gasoline passenger cars and trucks
 - Most evidence⁵ suggests that MOVES under-predicts NOx for HD diesel
- Focus on running exhaust emissions
 - Due to lack of significant sources of independent data for start emissions
 - Running exhaust emissions contribute over 80% of NOx emissions from onroad gasoline and diesel




Comparison to Denver I/M Data

- **GOAL:** compare MOVES BASE RATES to external data
 - Taken from input database
 - No modifications or adjustments (humidity, I/M compliance, etc.)
- **SCOPE:** running emissions for
 - Light-duty cars and trucks
 - Tier 2 vehicles (in MY 2010-2016)
 - Bins 8, 5, 4, 3, 2
 - Tier 1 cars (in MY 1996-2000)
- **BASIS:** NO_x emissions on IM240 cycle
 - Denver I/M: measurements
 - Using random sample
 - CY 2008-2015
 - MOVES2014a: simulate IM240 using modal rates
 - Average by age



Denver I/M Data (cont'd)

- Light-duty cars
 - Tier 2 (Bin 5 and equivalent) meeting 70 mg/mi NO_x FTP standard
- Distribution spans over 3 orders of magnitude

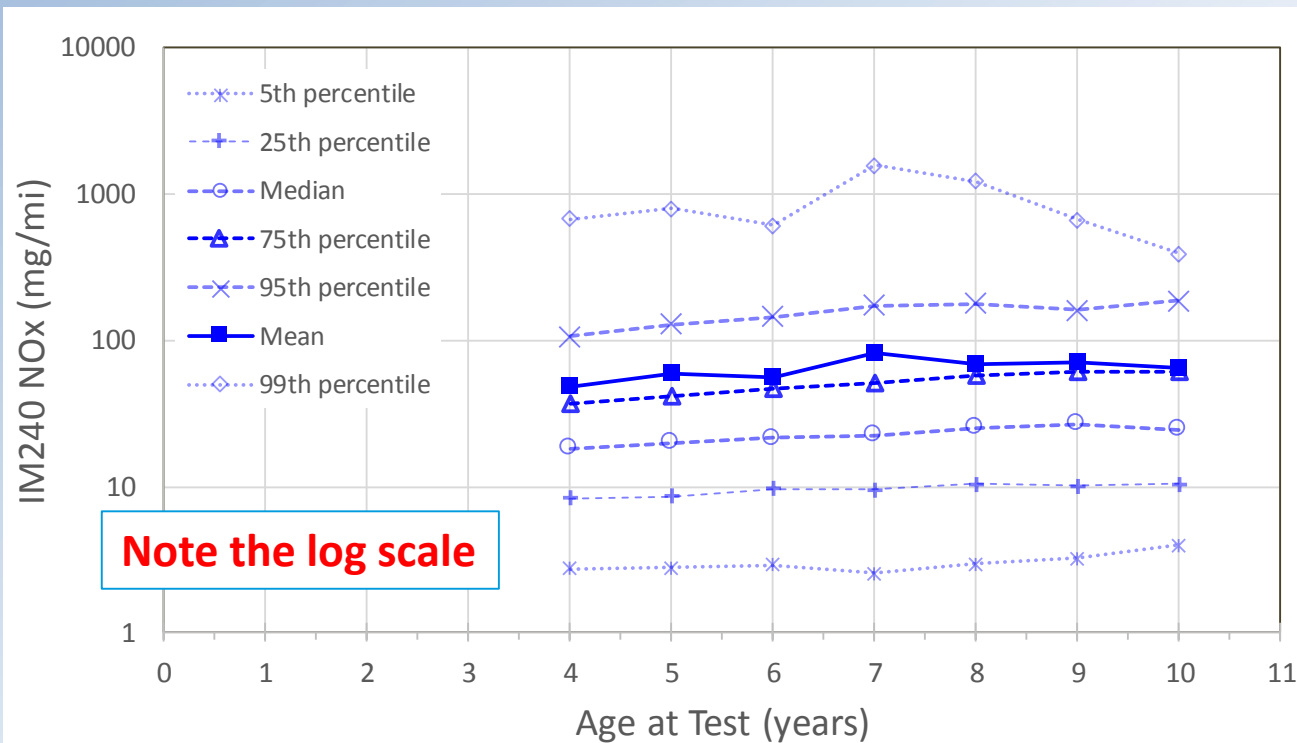


Preliminary Results for Tier 2 Cars: MOVES2014a Rates vs. Denver I/M

Tier 2 Passenger Cars

MOVES:
Simulated IM240
by age,
for MY 2010-2016

Denver:
Mean IM240
by age, for
“Bin-5”
(70 mg/mi NO_x FTP std)

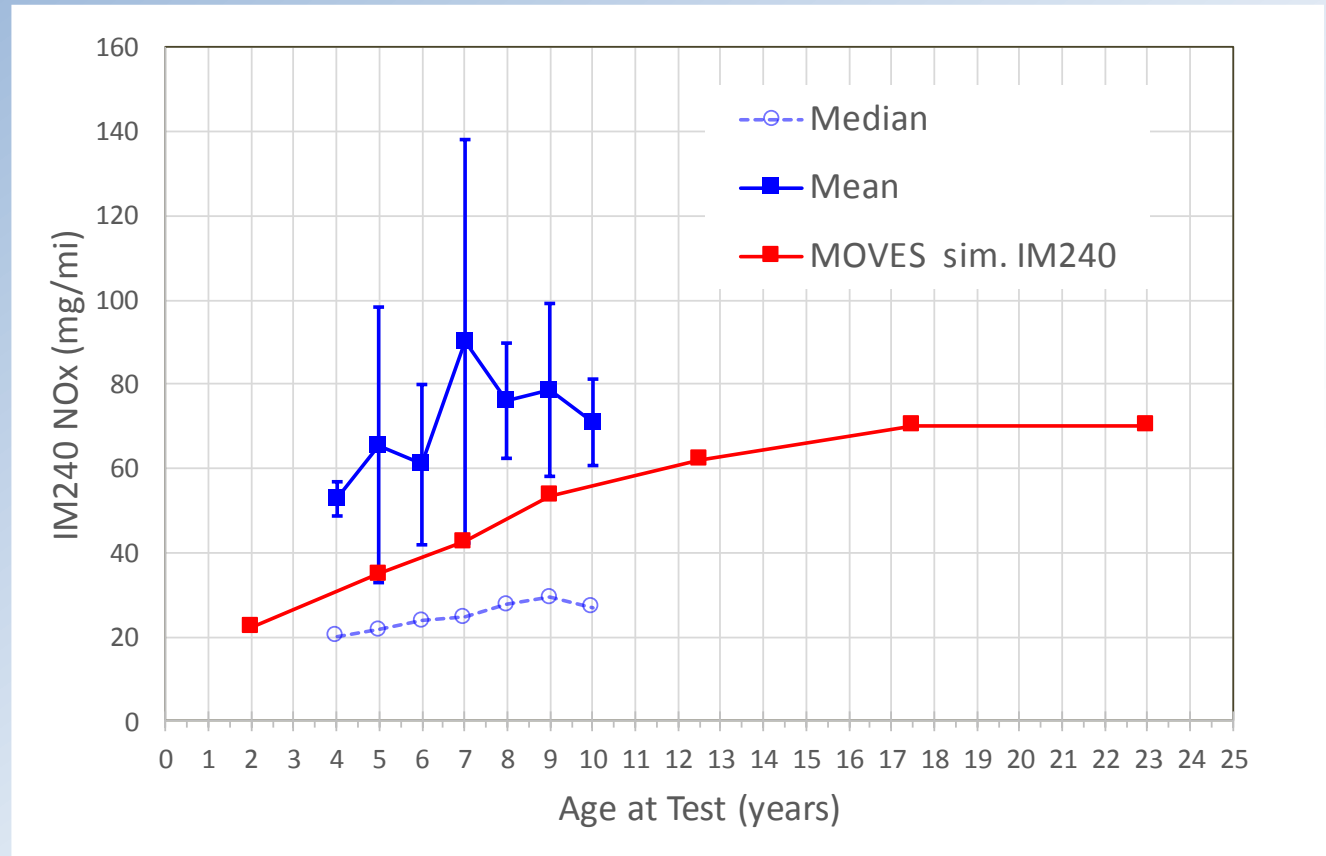

MOVES rates appear lower than corresponding I/M results.




Preliminary Results for Tier 1 Cars: MOVES2014a Rates vs. Denver I/M

Tier 1 Passenger Cars

MOVES:
Simulated IM240
by age,
for MY 1996-2000

Denver:
Mean IM240
by age, for
Tier 1
(600 mg/mi NO_x FTP std)

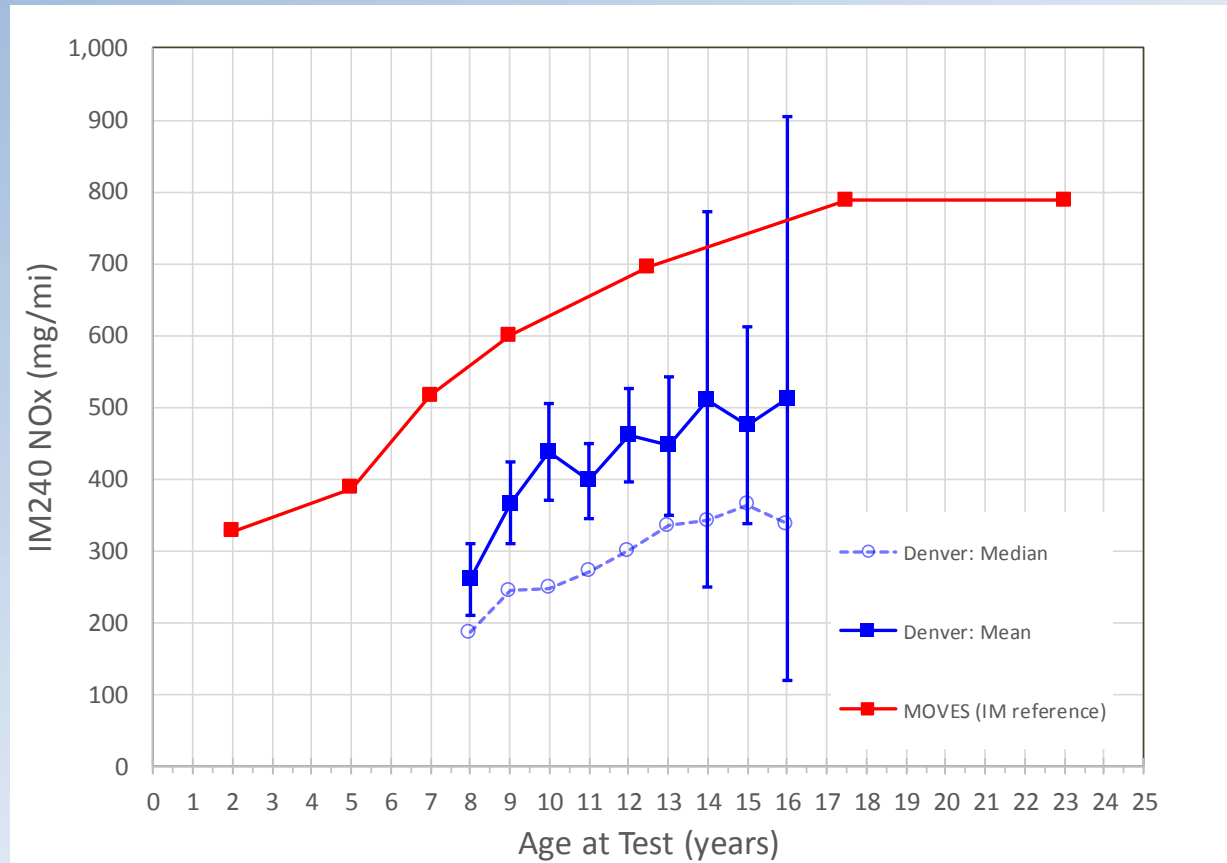

MOVES rates appear higher than corresponding I/M results.



Limitations & Areas for More Work

- **Sample sizes (for each age level)**
 - T1: 10 – 370 vehicles
 - T2: 240 – 2,460 vehicles
 - Larger samples probably give a more representative comparison
- **Fuel properties**
 - Data collected over 8 years
 - Fuels changing over time
- **Temperature**
 - Don't expect effect for hot-running operation
- **Altitude** (adjust if appropriate)
- **Potential positive bias due to “clean screen”**
 - Vehicles screened by remote sensing
 - “Clean” vehicles exempted from inspection



Comparisons to Remote Sensing Data

- University of Denver collected a series of remote sensing data, funded by Coordinating Research Council
 - Measurement sites in Arizona, California, Colorado, Illinois, Maryland, Nebraska, Nevada, Pennsylvania, Texas, Oklahoma, Utah, and Washington
 - Typically collected at on-ramps during weekdays
- Remote sensing measured the ratios of CO, HC, NO*, to CO2 in the exhaust and reported the percent concentrations of pollutants
- RSD databases include
 - Measurement conditions (i.e., speed, acceleration, temperature, and humidity)
 - Vehicle information (i.e., Vehicle Identification Number (VIN))
 - Flags for invalid measurements



RSD Data

- Current analysis includes RSD data that were collected over multiple years at the same location
 - Phoenix, AZ, Denver, CO, Chicago, IL, and Tulsa, OK
 - In calendar years 1999 to 2007 and 2013 to 2015
 - Total number of measurements: ~400,000

RSD Sites	Number of Measurements (light-duty cars and trucks combined)
Phoenix, AZ	95,266
Chicago, IL	107,007
Denver, CO	127,518
Tulsa, OK	64,658



MOVES Runs

- **MOVES project scale** used to simulate the measurement conditions, as much as possible
- County inputs include:

Input	Time & Location-Specific	MOVES Default
Operating Mode Distribution	X	
Age Distribution	X	
Fuel Properties		X*
Meteorology	X	
Inspection/Maintenance		X


**With the exception of sulfur, MOVES defaults were used for all fuel properties.*

- Pollutants – nitric oxide (NO) and total energy consumption



Project Scale vs. MOVES National Scale

- MOVES national scale runs using the default inputs result in significantly higher emissions than the project scale runs
 - MOVES can show clear over-prediction when not properly modeled
- Highlights the importance of modelling the measurement conditions as much as possible using the project scale when evaluating MOVES



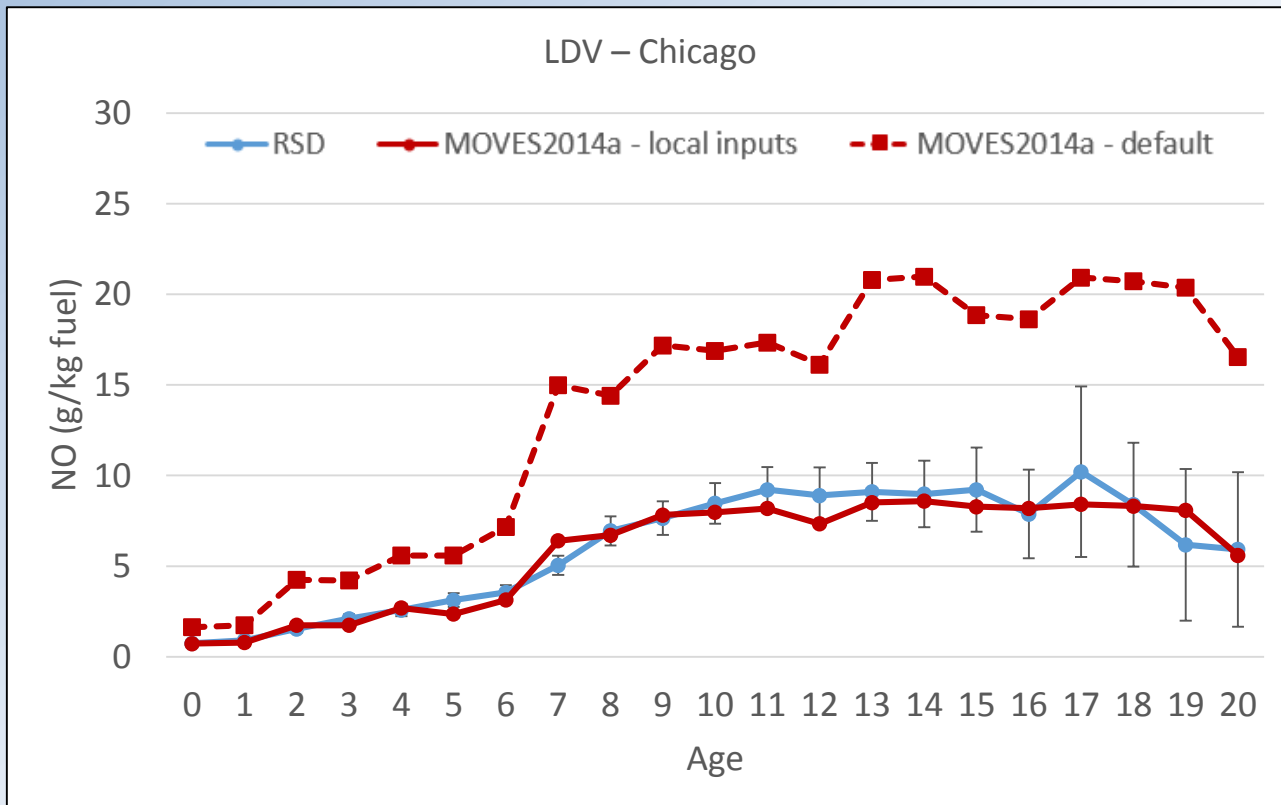


Sample Results – Comparisons to RSD

- Showing illustrative results
 - Only light-duty passenger cars
 - For select calendar years
- Comparisons for light-duty trucks similar to passenger cars
- RSD sites differ in age distributions, operating mode distributions, presence of I/M programs, altitude, etc.





Sample Results: MOVES2014a vs. RSD for CY2013-2015

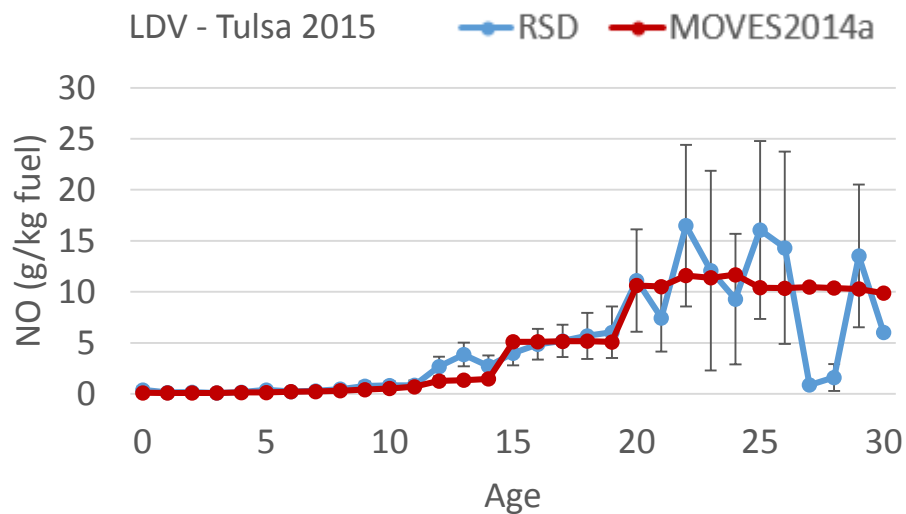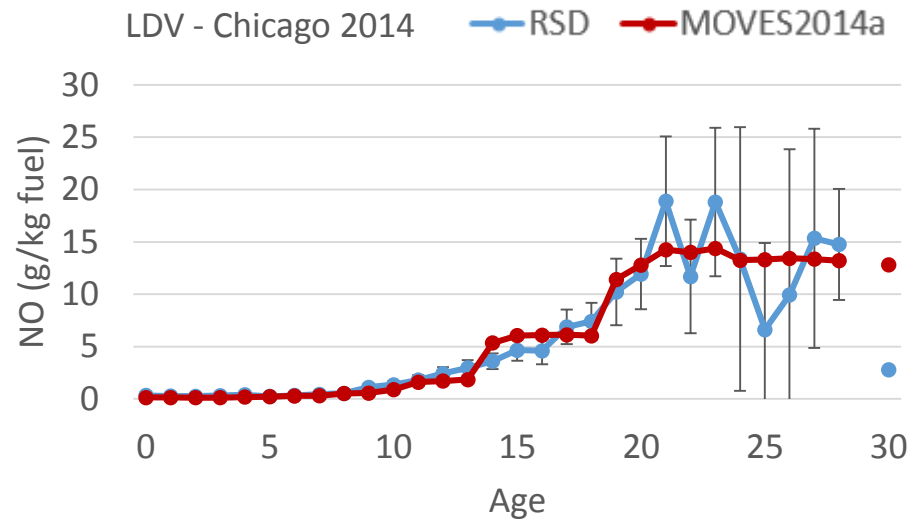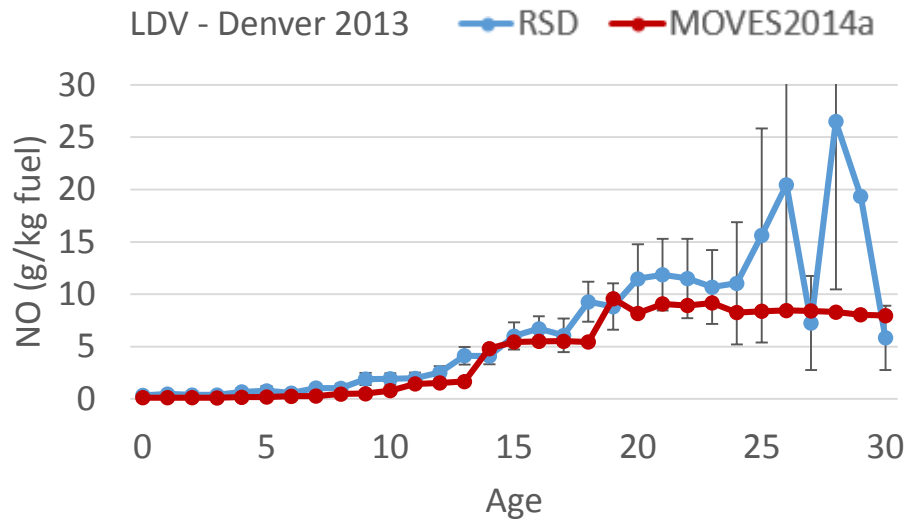

- MOVES2014a lower for Tier 2 vehicles
- For Tier 1 vehicles, MOVES2014a generally within the variability of the data

Sample Results: MOVES2014a vs. RSD for CY2005

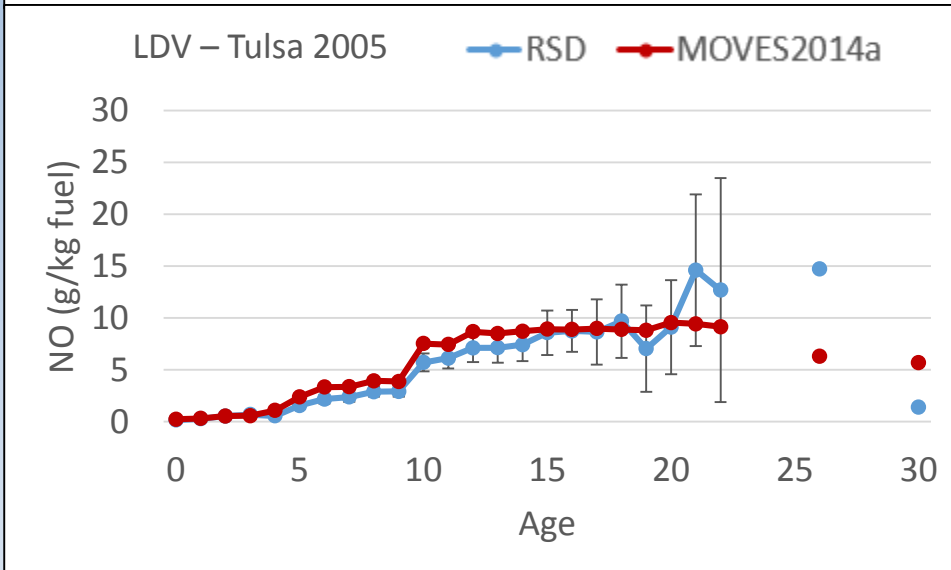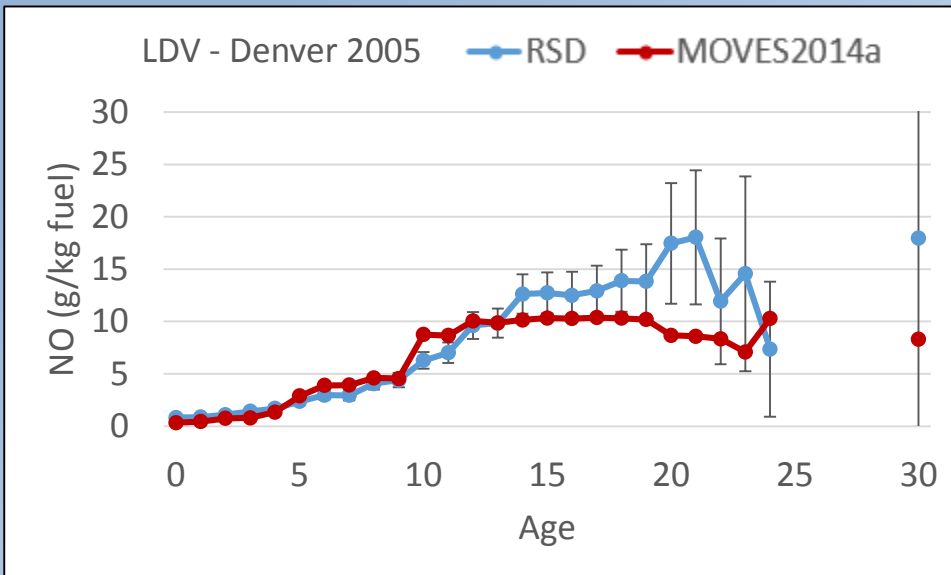

- MOVES2014a lower or within the variability of the data for Tier 2 vehicles
- MOVES2014a higher than RSD for Tier 1 vehicles



Next Steps – Comparisons to RSD

- Analyze other available RSD datasets
- Understand variations between RSD sites and calendar years
- Evaluate fuel consumption in MOVES
 - Since comparisons made in fuel-based emission rates



Tunnel Comparisons

- Caldecott Tunnel
 - 1 km long tunnel in Oakland, California
 - 4% uphill grade (eastbound)
 - 3 separate two-lane traffic bores
 - Bore 2 is limited to light-duty vehicles (switches direction with flow of commuter traffic)
- UC-Berkeley derived fleet-average emission rates from their most recent campaign (2010)^{6,7}
 - Measured pollution concentrations: 4-6 pm, 8 weekdays, July 2010



Picture from Dallmann et al. 2013⁷




MOVES2014a Comparison to Caldecott Tunnel

- MOVES default runs
 - Run at National-scale
- MOVES project-scale used to model the tunnel conditions
 - Created inputs from measurements conditions, e.g.
 - 4% grade
 - CA standards
 - Section 177/LEV inputs for CA standards on 1994+ vehicles
 - Lower, midpoint, and upper bound for uncertain inputs
 - Age distributions
 - Driving cycles
 - Fuel sulfur levels



Tunnel Comparison - Preliminary Results

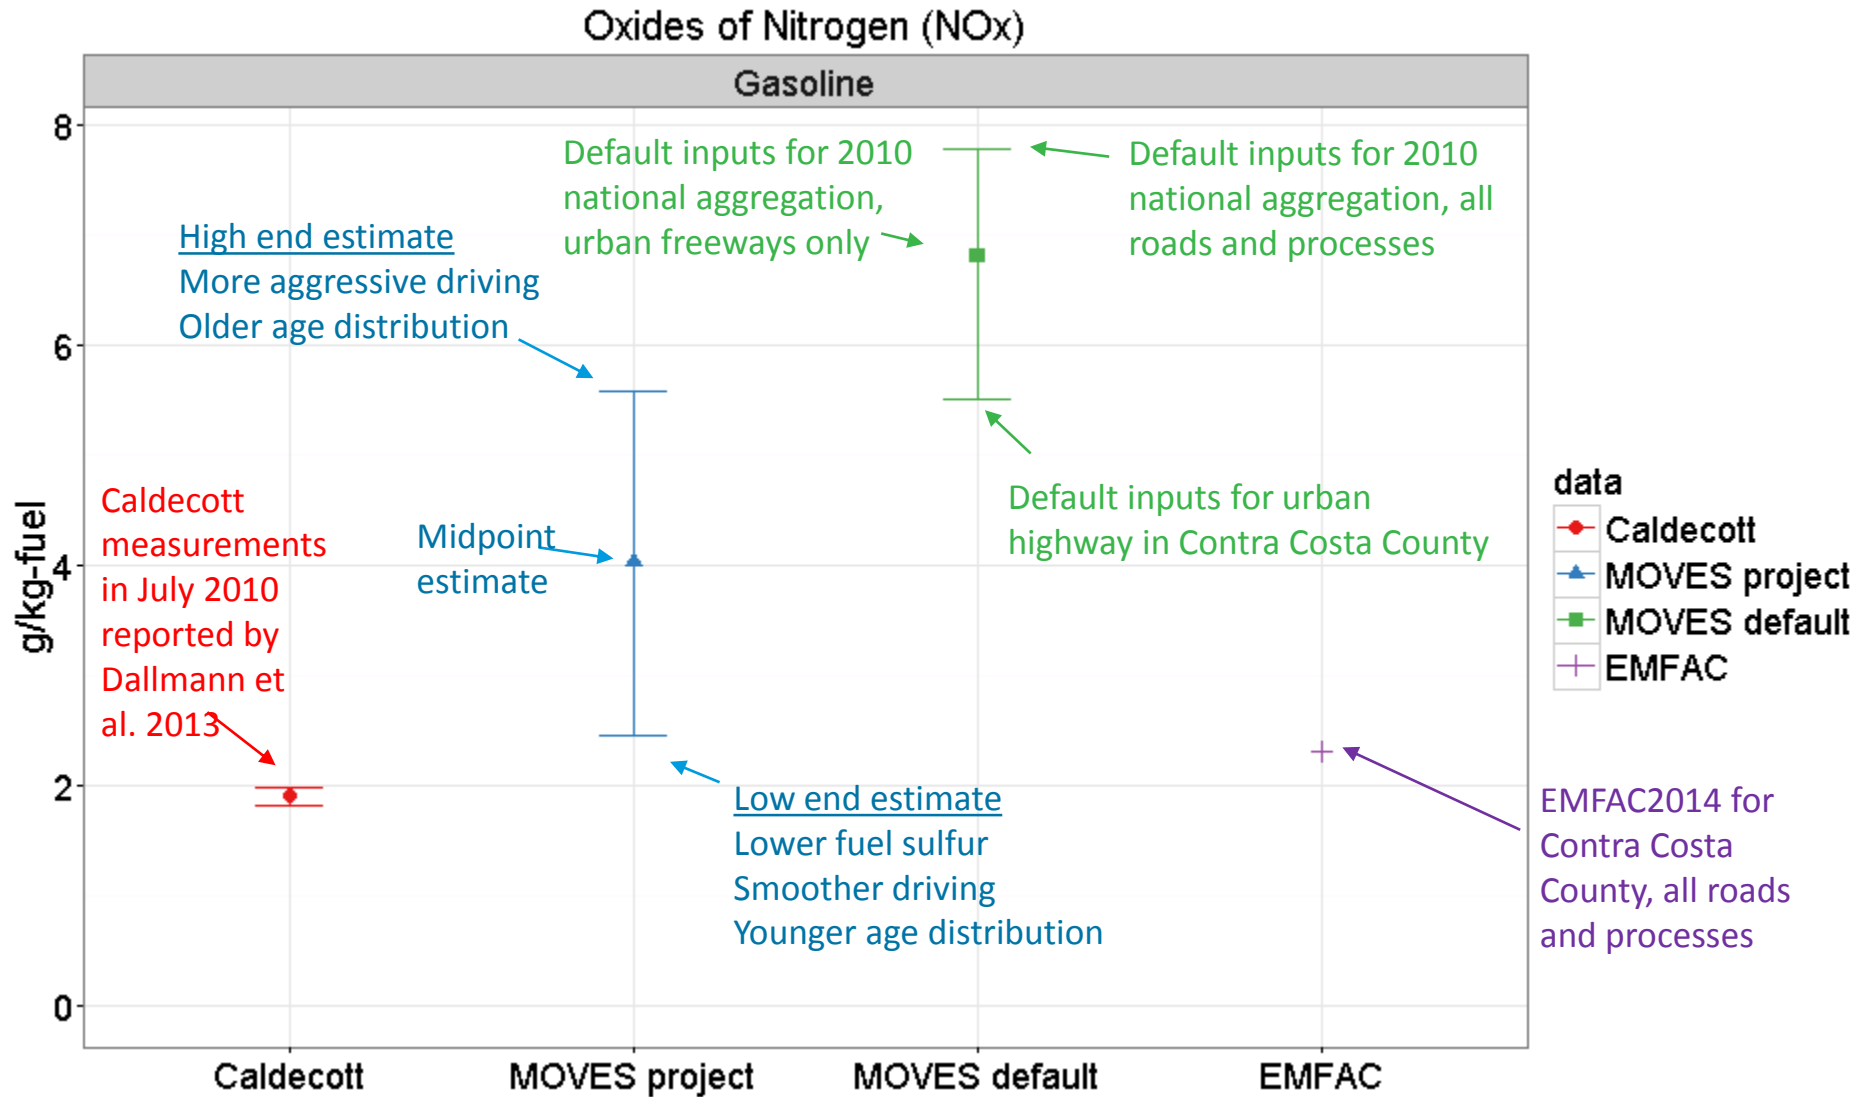

Tunnel Comparisons - Observations and Limitations

- Observations
 - Key sources of uncertainty for project-level runs
 - For NOx g/kg-fuel: **age distributions, LEV inputs**
 - For NOx grams: **age distributions, LEV inputs, driving cycles**
 - In the case of Caldecott Tunnel, using national defaults produced substantially higher emission rates than using project-level inputs
- Limitations
 - Caldecott tunnel gasoline measurements have tended to be lower than other remote sensing studies^{8,9}
 - MOVES data is not based on CA vehicles or fuels, e.g.
 - Section 177/LEV inputs do not account for differences in CA and National vehicle program for pre-1994 vehicles



Summary

- When doing comparisons to RSD and tunnel measurements, it is important to properly model the measurement conditions
- We will be continuing and refining our comparison of MOVES2014a to I/M, RSD, and tunnel measurements
- Additional work exploring other aspects of the air quality modeling system is also ongoing



Acknowledgements

- Gary Bishop and Don Stedman at University of Denver
- Coordinating Research Council (E-23, E-106)
- Colorado Department of Public Health and Environment (CDPHE)
- Eastern Research Group (ERG)
- Timothy Dallmann, Brian McDonald and Robert Harley from University of California-Berkeley



References

1. National Research Council. *Modeling Mobile Source Emissions*. National Academy Press, 2000
2. US EPA. *Guidance for Quality Assurance Project Plans for Modeling*. EPA/240/R-02/007, December 2002.
3. Anderson, D. C., C. P. Loughner, G. Diskin, A. Weinheimer, T. P. Canty, R. J. Salawitch, H. M. Worden, A. Fried, T. Mikoviny, A. Wisthaler and R. R. Dickerson (2014). Measured and modeled CO and NO_y in DISCOVER-AQ: An evaluation of emissions and chemistry over the eastern US. *Atmospheric Environment*, 96 (0), 78-87. DOI: 10.1016/j.atmosenv.2014.07.004.
4. Travis, K. R., D. J. Jacob, J. A. Fisher, P. S. Kim, E. A. Marais, L. Zhu, K. Yu, C. C. Miller, R. M. Yantosca, M. P. Sulprizio, A. M. Thompson, P. O. Wennberg, J. D. Crouse, J. M. St. Clair, R. C. Cohen, J. L. Laughner, J. E. Dibb, S. R. Hall, K. Ullmann, G. M. Wolfe, I. B. Pollack, J. Peischl, J. A. Neuman and X. Zhou (2016). NO_x emissions, isoprene oxidation pathways, vertical mixing, and implications for surface ozone in the Southeast United States. *Atmos. Chem. Phys. Discuss.*, 2016, 1-32. DOI: 10.5194/acp-2016-110.
5. McDonald, B. C., S. McKeen, R. Ahmadov, S.-W. Kim, G. Frost and M. Trainer (2015). Modeling Ozone in the Eastern United States Using a Fuel-Based Mobile Source Emissions Inventory. AGU Fall Meeting 2015. San Francisco.
6. Dallmann, T. R., S. J. DeMartini, T. W. Kirchstetter, S. C. Herndon, T. B. Onasch, E. C. Wood and R. A. Harley (2012). On-Road Measurement of Gas and Particle Phase Pollutant Emission Factors for Individual Heavy-Duty Diesel Trucks. *Environ Sci Technol*, 46 (15), 8511-8518. DOI: 10.1021/es301936c.
7. Dallmann, T. R., T. W. Kirchstetter, S. J. DeMartini and R. A. Harley (2013). Quantifying On-Road Emissions from Gasoline-Powered Motor Vehicles: Accounting for the Presence of Medium- and Heavy-Duty Diesel Trucks. *Environ Sci Technol*, 47 (23), 13873-13881. DOI: 10.1021/es402875u.
8. Ban-Weiss, G. A., J. P. McLaughlin, R. A. Harley, M. M. Lunden, T. W. Kirchstetter, A. J. Kean, A. W. Strawa, E. D. Stevenson and G. R. Kendall (2008). Long-term changes in emissions of nitrogen oxides and particulate matter from on-road gasoline and diesel vehicles. *Atmos Environ*, 42 (2), 220-232.
9. Tao, I., L. Bastien and R. Harley (2016). A Fuel-Based Evaluation of EMFAC 2014 Motor Vehicle Emission Inventory Model Predictions. May 2016.