

Appendix C: Stream Buffer Width Literature Review

Influences on stream temperature

The current theory to explain the nature of heat is called the kinetic-molecular theory. The modern version of this theory was developed in the mid-19th century by Rudolf Clausius, James Clerk Maxwell, and Ludwig Boltzmann. The theory relies on the observation that all matter is composed of tiny populations of molecules that are always in motion. The molecules in hot objects move faster and hence have greater kinetic energy than the molecules in cold objects. Individual molecules have a certain amount of kinetic energy based on their mass and velocity. The thermal energy of an object is determined by adding up the kinetic energies of all the molecules in that object. When a hot and cold object contact each other, their molecules collide and kinetic energy flows from molecules with more kinetic energy to those with less kinetic energy. This type of kinetic energy flow is called heat. The temperature of an object is the measure of the average kinetic energy of all molecules in that object.

Water temperature change (ΔT_w) is a function of the heat transfer in a discrete volume and may be described in terms of changes in heat per unit volume (Equation 1). Conversely, a change in volume can result in water temperature change for a fixed amount of heat exchange. With this basic conceptual framework of water temperature change, it is possible to discuss stream temperature change as a function of two variables: heat transfer (Figure 1-1) and mass transfer.

Water Temperature Change as a Function of Heat Exchange and Volume Equation 1

$$\Delta T_w = \frac{\Delta \text{Heat}}{\text{Density} \times \text{Specific Heat} \times \Delta \text{Volume}}$$

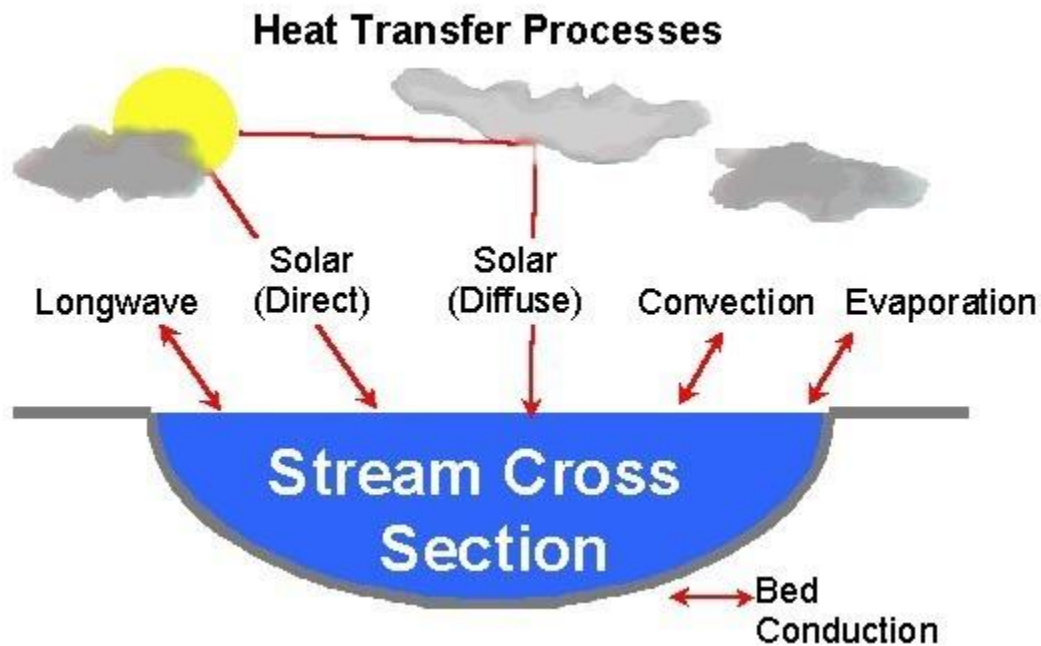


Figure 0-1: Major heat transfer processes.

Heat transfer relates to processes that change heat in a defined water volume. Several thermodynamic pathways may introduce or remove heat from a stream. Their various processes are shown in Figure 0-1. For a given stream reach, heat exchange is closely related to the season, time of day, surrounding environment, and stream characteristics. Heat transfer is dynamic and may change over relatively small distances and time periods. Equation 2 describes the several heat transfer processes that affect stream temperature (Wunderlich, 1972; Jobson and Keefer, 1979; Beschta and Weatherred, 1984; Sinokrot and Stefan, 1993; Boyd, 1996; Johnson, 2004; Hannah et al., 2008; Benyahya et al., 2012).

$$\Phi_{total} = \Phi_{solar} + \Phi_{longwave} + \Phi_{streambed} + \Phi_{convection} + \Phi_{evaporation} \quad \text{Equation 2}$$

Where,

Φ_{total} = Net heat energy flux (+/-)

Φ_{solar} = Shortwave direct and diffuse solar radiation (+ only)

$\Phi_{longwave}$ = Longwave (thermal) radiation (+/-)

$\Phi_{streambed}$ = Streambed conduction (+/-)

$\Phi_{convection}$ = Stream/air convection¹ (+/-)

$\Phi_{evaporation}$ = Evaporation (+/-)

¹Stream/air convection includes both turbulent and free surface conduction.

Mass transfer relates to downstream flow volume transport, instream mixing, and the addition or removal of stream water. For example, inflow from a tributary will result in temperature change if the tributary and receiving water temperatures differ. Mass transfer commonly occurs in stream systems due to:

- Advection,
- Dispersion,
- Groundwater exchange,
- Hyporheic flows,
- Surface water exchange (e.g. tributary input, precipitation), and
- Other human related activities that alter stream flow volume.

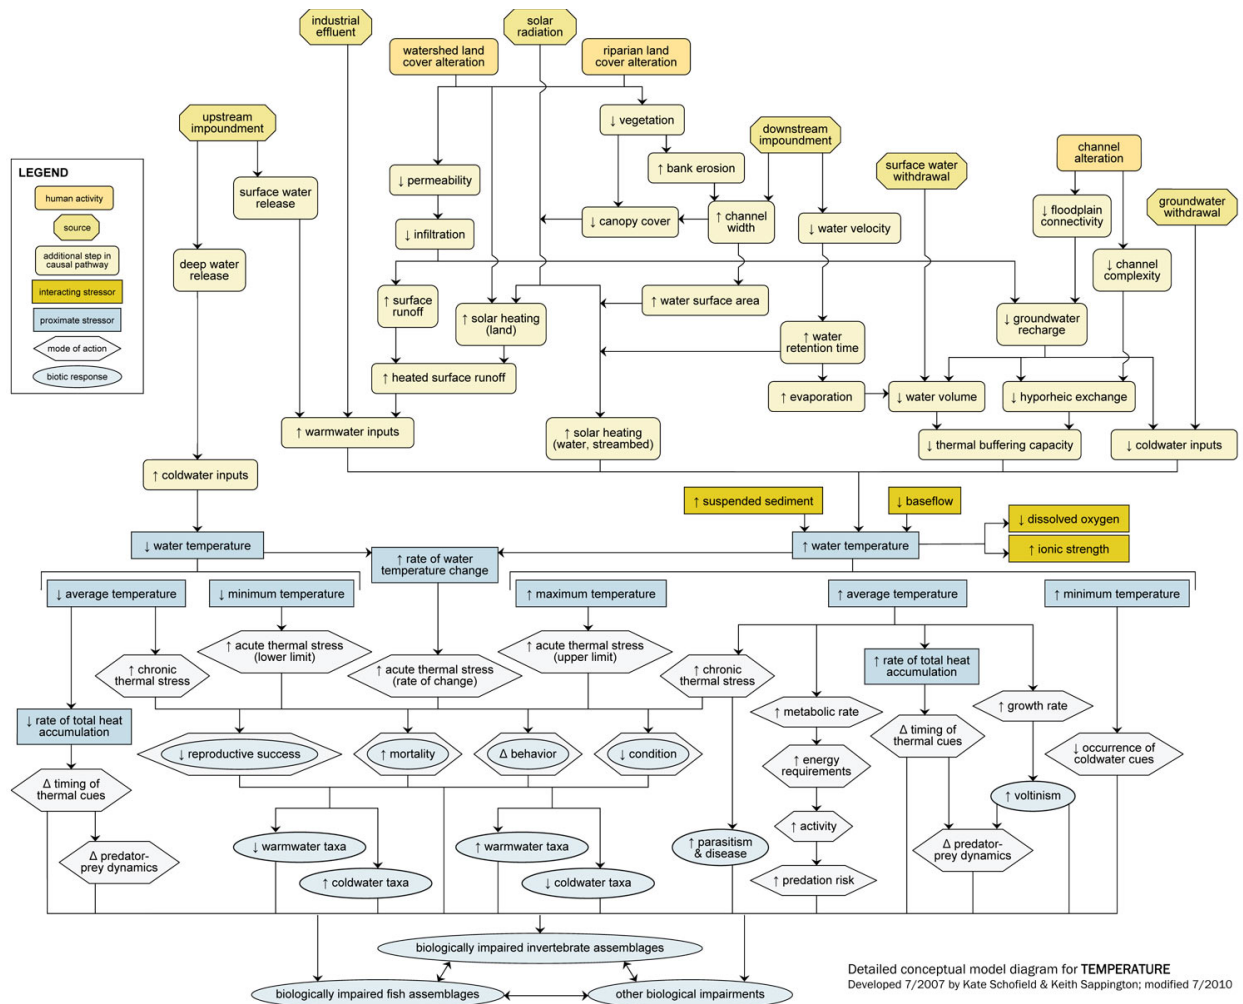


Figure 0-2: Conceptual diagram that identifies the key processes and variables that drive stream temperature changes and the associated biological responses (Schofield and Sappington, 2010).

Stream temperature is influenced by both human and natural factors that occur above the water surface, in the streambed, within the water column, and in the surrounding landscape (Poole and Berman 2001). Figure 0-2 is a conceptual diagram developed by Schofield and Sappington 2010 that identifies the key process and variables that drive stream temperature. Human sources and natural sources are identified. Near the bottom of the diagram the biological responses are identified.

The effects of riparian vegetation on shade and stream temperature have been studied extensively, and it is generally accepted that removing trees in riparian areas reduces the amount of shade which leads to increases in solar radiation loading to the stream (Groom et al 2011, Moore et al 2005). Increased solar radiation is a result of vegetation removal and is generally the dominant component of the energy budget in terms of heat gain (Caissie 2006, Johnson, 2004).

The magnitude of temperature increases from increased direct solar radiation after the removal of shade depends on the net effect of multiple factors, including the volume and depth of the river, the temperature of the river prior to solar radiation loading, and the amount of groundwater/hyporheic input into the reach (Poole and Berman 2001, Caissie 2006, Janisch et al. 2012). Accordingly, stream temperature response to riparian disturbance is often variable in reported literature.

1.1 Impact of riparian buffer width change on stream temperature

Stream temperature change to different riparian buffer width harvest treatments were reported in Coble et al 2020, Quinn et al 2020, Cowan et al 2019, and Leinenbach et al 2013. These listed sources obtained temperature response results from published articles and reports including: Bladon et al, 2017; Brazier and Brown, 1973; Dent and Walsh, 1997; Gomi et al, 2006; Groom et al 2011; Janisch et al, 2012; Newton and Cole, 2013; Veldhuisen and Couvelier, 2006; and Volpe, 2009. This information was provided to DEQ by these sources and subsequently DEQ added additional published results including Groom et al 2018, McIntyre et al. 2018, and Ehinger et al 2021. DEQ combined all the results and plotted the data. These results are presented in Figure 0-3. Buffer width, shown on the x-axis, can be reported as either a horizontal distance or as a slope distance. Horizontal distance is when the buffer width is measured in the field horizontally, regardless of slope. Slope distance is when the buffer width is measured in the field accounting for the slope within the buffer area. Slope distance will almost always be larger than horizontal distance, and this difference increases as the slope of the riparian buffer zone increases. The studies summarized in Figure 0-3 used a combination of horizontal distance and slope distance to report buffer width, however not all studies reported which method was used. For the studies that did, most sites used slope distance. Buffer widths in Figure 0-4 are all measured using slope distance.

Figure 1-3 indicates that there is a high observed variability of stream temperature response at the individual site level, but the general temperature response trend is similar to that indicated by the Bayesian model described in Groom et al 2018 (Figure 0-4). These studies show that stream temperatures increased at a greater rate as the buffer width gets smaller. Of all the studies, Groom et al 2011 and Groom et al 2018 had the largest number of study sites (n=33), all located in Western Oregon. Both studies relied upon on the same field data: The data plotted from Groom et al 2011 are field measured results (included in Figure 1-3), while the data from Groom et al 2018 are based on results of a Bayesian model (Figure 0-4). Specifically, this Bayesian model describes the expected stream temperature response resulting from the narrowing of the riparian buffer after harvest. The black line in Figure 1-4 indicates the mean response at the 33 sites, the dashed black line and dashed grey line represents a 50% and 95% Credible Interval (CI), respectively. The horizontal grey line in this figure indicates a 0.3 °C temperature increase. Based on these results, a slope distance buffer width of 27.4 meters (90 feet) produced mean temperature increase of 0.3 °C. A slope distance buffer width of about 36.6 meters (120 feet) was shown to not increase mean water temperatures. Stream temperature response results reported from field data showed a similar result for the 120 feet buffer width scenario (Figure 0-3), as reported for the Bayesian model (Figure 1-4).

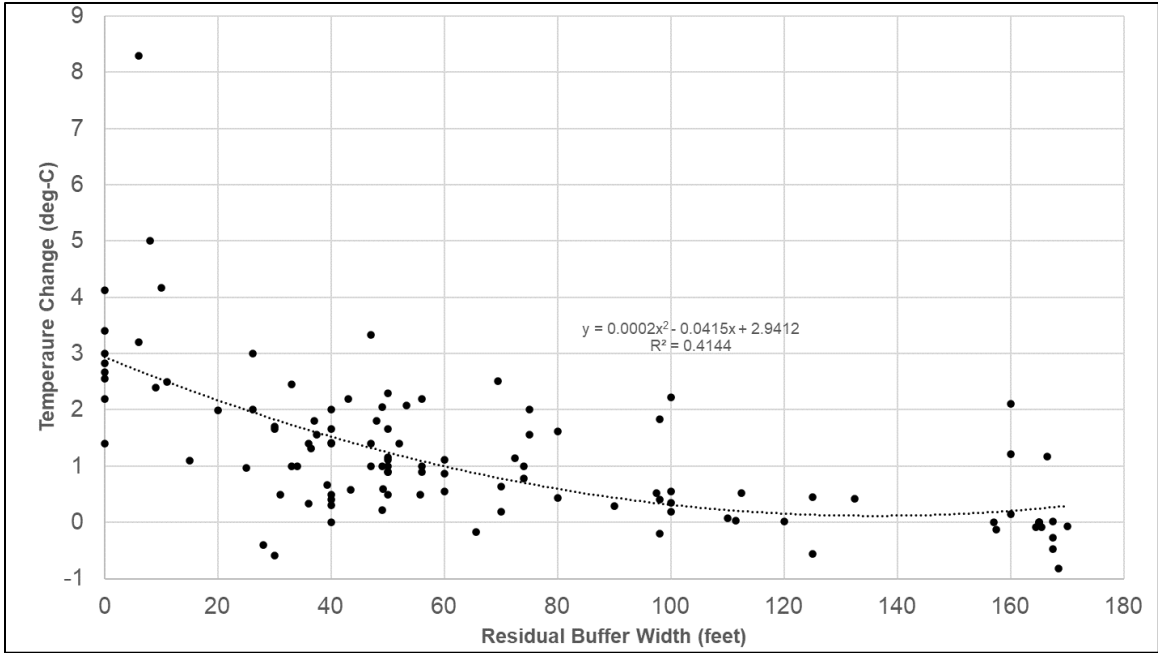


Figure 0-3: Reported stream temperature increase following buffer width narrowing resulting from forest harvest.

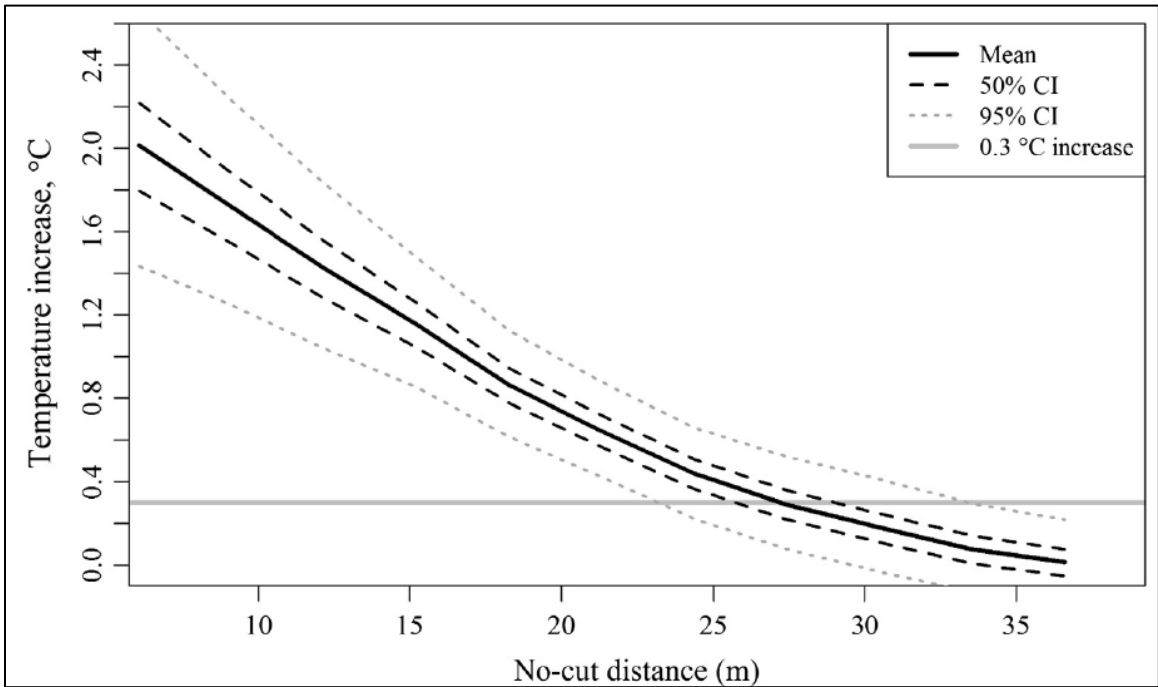


Figure 0-4: Mean temperature responses among all sites to simulated harvest using a slope distance two-sided buffer width (Groom et al 2018).

1.2 Impact of riparian buffer density change on stream temperature

Roon et al 2021b determined that stream temperature response to riparian forest thinning was positively associated with the intensity of thinning treatments, and the downstream propagation of these local responses extended from 100 m to over 1000 m and was dependent on the magnitude of the temperature increase resulting from thinning activities. This study highlighted that more intensive thinning resulted in a greater extent of the stream temperature pulse transported downstream. Collectively, they determined that riparian forest thinning influenced downstream thermal conditions to varying extents depending on the intensity, scale, and spatial proximity of treatments to the stream.

Leinenbach et al (2013) presented results of field studies that evaluated stream temperature changes associated with riparian buffer thinning activities, along with the narrowing of the buffer (Mellina et al. 2002, Macdonald et al. 2003, Wilkerson et al. 2006, Kreutzweiser et al. 2009) (Figure 0-5). Similar to the results reported in Roon et al 2021b, the observed temperature response varied from no effects to large increases which appeared to be related to differences in the intensity of thinning, with stronger effects associated with higher thinning intensities, however this observed trend on thinning effects is partially confounded from the situation that these studies also included buffer narrowing harvests. Regardless, these studies indicate that riparian thinning actions can result in increased stream temperature and these effects are dependent on the intensity, scale and spatial proximity of treatments to the stream.

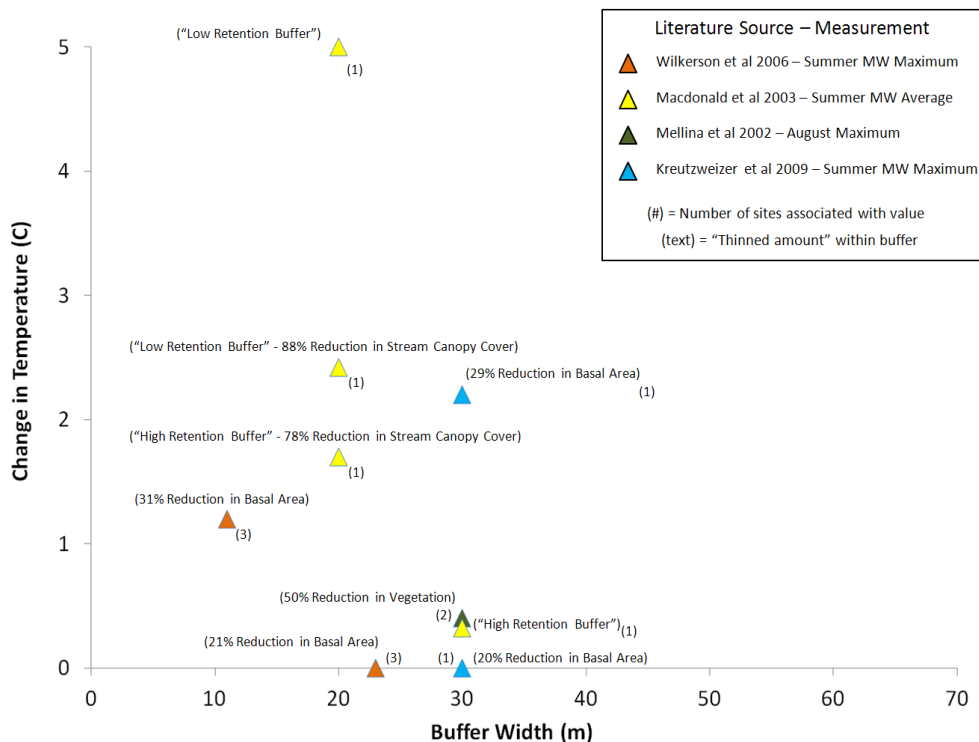


Figure 0-5: Observed temperature response associated with “thinned” riparian buffers with adjacent clearcut harvest. Corresponding references and measurement methods and types are listed in the legend. Abbreviation: MW = mean weekly (Source – Leinenbach et al 2013).

Influences on effective shade

Effective shade is the percent of potential daily solar radiation flux that is blocked by vegetation and topography (Boyd and Kasper, 2003, McIntyre et al., 2018). Effective shade can be measured with a solar pathfinder instrument (Solar Pathfinder 2016). The measurement methods and quality control procedures are outlined in the Water Quality Monitoring Technical Guide Book (OWEB 1999) and the solar pathfinder manual (Solar Pathfinder 2016). Effective shade can also be measured using collected hemispherical imagery as described in Ringold et al 2003, WADOE 2019a, and WADOE 2019b.

Physical and ecological factors affecting effective shade include, riparian vegetation height, riparian vegetation buffer width, riparian vegetation density, stream channel width, topographic elevation, stream aspect, cloudiness, and latitude. The latter four factors are generally not influenced by human activity. This review focuses on the factors that can be influenced by human activity.

Generally, stream shade loss is generally positively correlated with riparian vegetation removal (Barnowe-Meyer et al 2021). However, stream shade response to vegetation removal will depend on complex interactions between riparian vegetation height, density, and buffer width conditions following harvest activities (Groom et al 2011). Specifically, the amount of stream shade produced by riparian vegetation is a function of three characteristics of the “shade”: (1) shade extent; (2) shade duration; and (3) shade quality. Shade extent is the spatial area over which a shadow is cast over a stream. Shade duration is the length of time during which a portion of stream is shaded. Shade quality is the density of the shade produced by the vegetation.

The removal or modification of trees in riparian areas can affect the spatial extent, duration, and quality of shade on a stream. In particular, the extent and duration of stream shade associated with riparian vegetation is dependent on: (1) the tree height; and (2) the stream channel width, while the shade quality is primarily dependent on: (1) vegetation buffer width (i.e., the path-length of the sun rays traveling through the riparian stand); and (2) the canopy density of trees within the riparian stand that the sun passes through (i.e., as indicated by angular canopy density). Specifically, changes in vegetation height conditions affects the length of the shadow produced by the vegetation (DeWalle 2010; DeWalle 2008, Cristea and Janisch 2007, Li et al 2012), with taller trees casting shadows on the stream in riparian buffer locations further away from the stream than can be achieved by shorter trees. In addition, vegetation density and vegetation buffer width are positively correlated with increased attenuation of solar radiation traveling through the canopy and resulting in higher stream shade (DeWalle 2010; DeWalle 2008; Garner et al 2014; Groom et al 2011; Groom et al 2018; McIntyre et al 2018; and Ehinger et al 2021). Allen and Dent (2001) found that important variables in predicting stream shade were a combination of basal area, stand density (i.e., trees/acre), species composition, average stand diameter, and live crown ratios and the interaction between stand structure and aspect. Groom et al (2011) determined that stream shade was best predicted by riparian basal area and tree height, and reported that sites with higher stocking levels, wider uncut buffers, or fewer stream banks harvested had greater basal area and higher stream shade levels.

In summary, field and modeling studies have shown that the response of shade change to vegetation removal will depend on the interaction of vegetation height (Allen and Dent (2001), DeWalle 2008, DeWalle 2010, and Groom et al 2011), vegetation density (Allen and Dent 2001, Sridhar et al 2004, Cristea and Janisch 2007, DeWalle 2010, Groom et al 2011, McIntyre et al 2018, Roon et al 2021a, and Ehinger et al 2021), and vegetation buffer width (Cristea and Janisch 2007, DeWalle 2010, Janisch et al 2012, Groom et al 2018, McIntyre et al 2018, and Ehinger et al 2021). Generally, these studies indicate that shade loss is positively correlated with riparian vegetation removal/disturbance and the response is an interaction between changes in vegetation height, vegetation density and buffer width.

1.3 Impact of riparian buffer width change on stream shade

Stream shade change to different riparian buffer width treatments were reported in Quinn et al 2020 and Leinenbach et al 2013 (Figure 2-1). These listed sources obtained shade response results from published articles and reports including: Allen and Dent, 2001; Bladon et al, 2017; ODF 2015 (published in Groom et al, 2018); Janisch et al, 2012; and Shuett-Hames et al, 2012. This information was provided to DEQ by these sources and subsequently DEQ added additional published results including, Groom et al, 2011; McIntyre et al. 2018; Ehinger et al 2021; and Reiter et al, 2020). DEQ combined all the results and plotted the data shown in Figure 0-2. These two figures indicate that the stream shade loss rate resulting from riparian buffer width narrowing is positively correlated, with greater proportional stream shade loss occurring with narrower buffer widths. For example, a very low stream shade loss rate was observed between 110' and 100' buffer width condition, while a much greater loss rate was observed when the buffer width was reduced from 60' to 50'.

Through implementing a BACI¹ study at 33 forested sites in Western Oregon, Groom et al 2011 determined that stream temperatures increased following harvest activities when stream effective shade changes were greater than 6 percentage points (i.e., 6%), otherwise stream temperatures directionality fluctuated (i.e., no apparent temperature increase). As can be observed in Figure 0-1 and Figure 0-2, stream shade loss was below 6 units at buffer widths greater than 110ft, indicating that stream temperature increases resulting from harvesting outside of 120ft might not result in stream temperature increases.

As mentioned previously, buffer width can be reported as a horizontal distance or as a slope distance. Horizontal distance is when the buffer width is measured in the field horizontally, regardless of slope. Slope distance is when the buffer width is measured in the field accounting for the slope within the buffer. Slope distance will almost always be larger than horizontal distance, and this difference increases as the slope of the riparian buffer zone increases. The studies summarized in Figure 0-1 and Figure 0-2 used a combination of horizontal distance and slope distance to report buffer width.

¹ Before After Control Impact

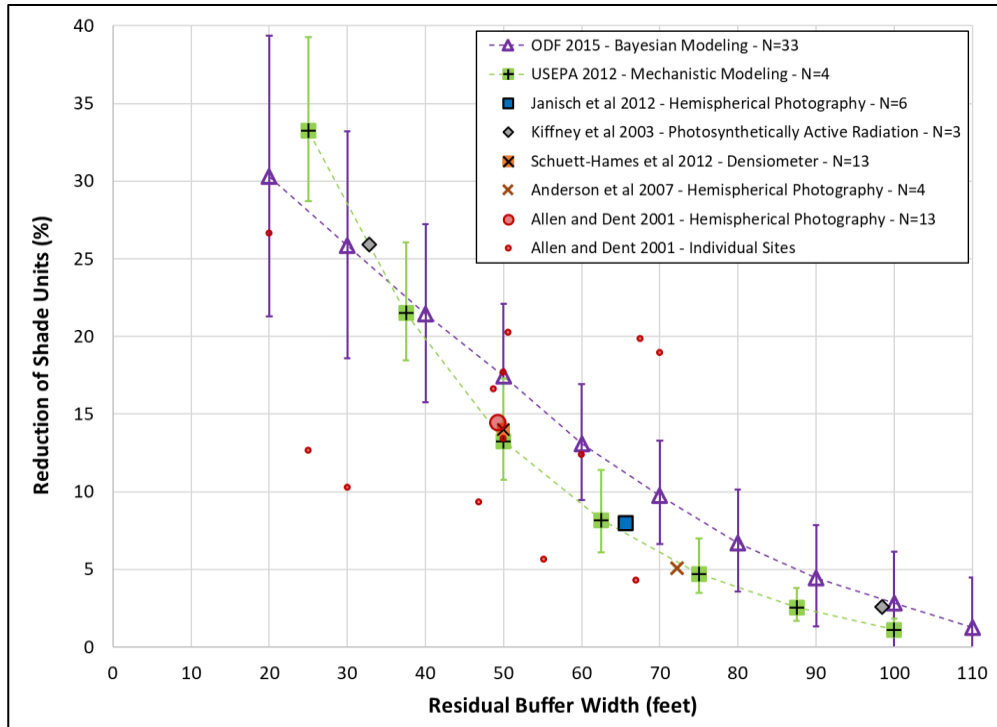


Figure 0-1: Average observed shade associated with “no-cut” riparian buffers with adjacent clearcut harvest (Obtained from Quinn et al 2020 – Page 91).

[Only field studies that employed a Before-After-Control-Impact design and conducted in Pacific Northwest forests are included and Bayesian modeling results (and 90% credible intervals) presented in this figure were derived from data collected as part of Groom et al. (2011).]

Using many of the same studies presented in Figure 0-1, along with several more recent studies, Figure 0-2 illustrates the relationship between buffer width and stream shade loss at the individual sites within these studies: Allen and Dent 2001; Bladon et al 2017; Ehinger et al 2021; Groom et al 2011; Groom et al 2018; McIntyre et al 2018; Reiter et al 2020; Shuett-Hames et al 2012. These figures illustrates that a range of stream shade loss can occur from narrowing of the riparian vegetation buffer width, which is likely due to interacting effects of multiple factors that vary between the individual sites in each study, which subsequently impact stream shade production (i.e., Differences in stream aspect, riparian canopy density, topography, channel width, tree height at the various sites included in each of these studies). Regardless of this increased variability, the same general pattern is observed between Figure 0-2 and Figure 0-1. Specifically, limited shade loss at buffer widths greater than 110ft and shade loss increases dramatically as the buffer width narrows less than 75ft.

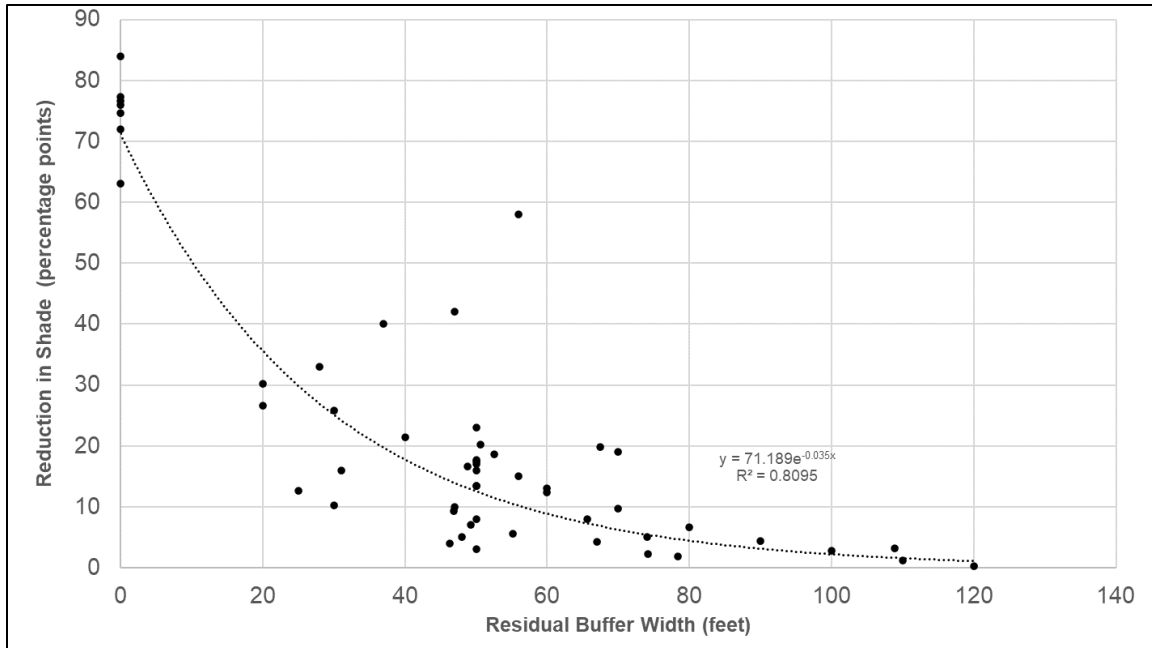


Figure 0-2: Observed stream shade loss at the individual sites associated with “no-cut” riparian buffers with adjacent clearcut harvest.

Barnowe-Meyer et al 2021 presented the results of a Bayesian modeling effort that evaluated the relationship between buffer width reductions (calculated using horizontal distance) and stream shade loss for Oregon streams (Figure 0-3). This plot shows the mean response (black line), along with the predicted 90% and 95% credible intervals as indicated by the colored zones. The results reported in this 2021 effort indicate that an approximately 110 foot horizontal distance buffer width is required to ensure mean stream shade loss does not occur, while 120’ distance was reported to be required when using individual measured values calculated from a combination of horizontal buffer distance and slope buffer distance sites (Figure 0-2). On a similar note, Cristea and Janisch 2007 reported that reference shade conditions were associated with a 120ft buffer width.

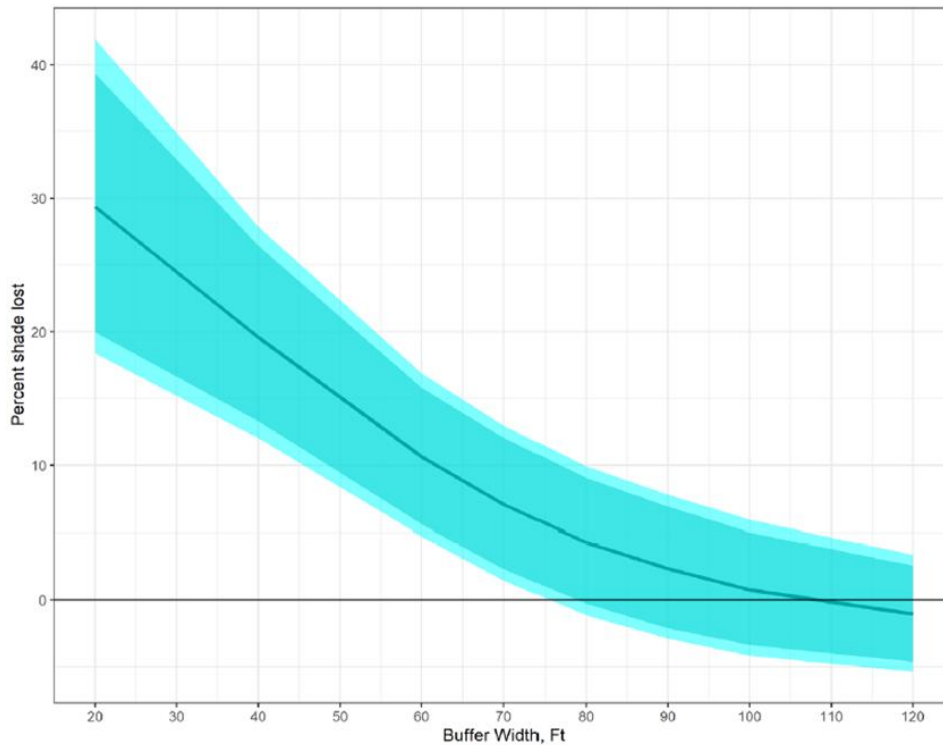


Figure 0-3: Predicted relationship between two-sided horizontal distance buffer width and percent shade lost post-harvest based on the data and analysis approach of Groom et al 2018. (Figure from Barnowe-Meyer et al 2021).

These reported relationships between riparian buffer width and stream shade conditions presented above are not unexpected based on how riparian tree shadow length is derived. Specifically, the distance of a shadow cast by a tree can be estimated by the following trigonometric equation²:

$$\text{Shadow Length} = \frac{\text{Tree Height} * \cos(\text{Hillslope Angle})}{\tan(\text{Sun Angle} - \text{Hillslope Angle})} - \text{Tree Height} * \sin(\text{Hillslope Angle})$$

Specifically, using this equation on a commonly reported TMDL representative riparian vegetation target condition (i.e., 100ft tall), it can be determined that the shadow length associated with this tree height condition are at least 120ft during periods of the day (Table 0-1). These results indicate that some stream shade contributions from the “tall” trees located outside of 100ft from the stream channel is possible. In addition, the application of this equation indicated that the shadow length increases as the riparian zone hillslope increases. These results indicate that it would be expected that trees at TMDL targeted height conditions located 100ft to 120ft from the stream *could have some impact* on stream shade condition and this result was observed/modeled and shown in Figure 0-1, Figure 0-2, and Figure 0-3).

² See Attachment A below for the derivation of this equation.

Table 0-1: Average July 21st and August 21st shadow length (feet) at different times and hillslopes.

Height of Tree (feet)	9 am	10 am	11 am	12 pm	1 pm	2 pm	3 pm	4 pm	5 pm	6 pm
Flat Hillslope										
100	181	123	88	67	57	60	74	100	142	217
20 Degree Hillslope										
100	599	239	140	95	78	82	109	169	321	1669

In summary, results presented above indicate that the exact amount of “shade” produced by the particular buffer condition (including the width of the buffer) depends on many attributes associated with the riparian stand being evaluated (i.e., channel width, stream aspect, season (i.e., height of the sun’s arc), topography, vegetation height and density). Accordingly, it was not unexpected that a range of stream shade responses were reported in the field and modeling studies presented above, however these studies also clearly showed that higher stream shade loss was observed at narrower buffer width conditions (i.e., < 75ft), as compared to wider buffer width conditions (i.e., >100ft). No decrease in effective shade was observed at buffer distances of 120 feet.

1.4 Impact of riparian buffer density change on stream shade

Thinning riparian buffer vegetation from “below” (i.e., removing small/short trees within the riparian stand) will primarily affect stream shade quality by increasing the transmission of solar radiation that can travel through the buffer, whereas thinning from “above” (i.e., removing large/taller trees that cast long shadows) most likely affects both stream shade quality and stream shade duration produced by vegetation within the riparian stand.

Unfortunately, relatively few studies have directly examined the effects of riparian thinning on stream shade conditions, but several studies can give insight into this relationship and are presented below.

Chan et al 2006 observed that a “light” forest thinning (i.e., thinning harvest retainment target of 103 trees per acre (TPA)) resulted in limited loss of canopy cover opening (i.e., 12%) and reported that openings mostly recovered to near pretreatment levels 6 years after thinning treatment, while moderate thinning (i.e., 56 TPA retained) and heavy (i.e., 29 TPA retained) resulted in much higher levels of canopy opening (i.e., 27% and 42%, respectively) and this impact did not return back to pretreatment levels at eight years following treatment. In addition, this study showed that canopy opening response to various thinning intensities was not a linear response, with higher stream shade loss response observed when tree removal occurs at lower canopy densities. Results of this study, along with results with two similar studies, are illustrated in Figure 0-4.

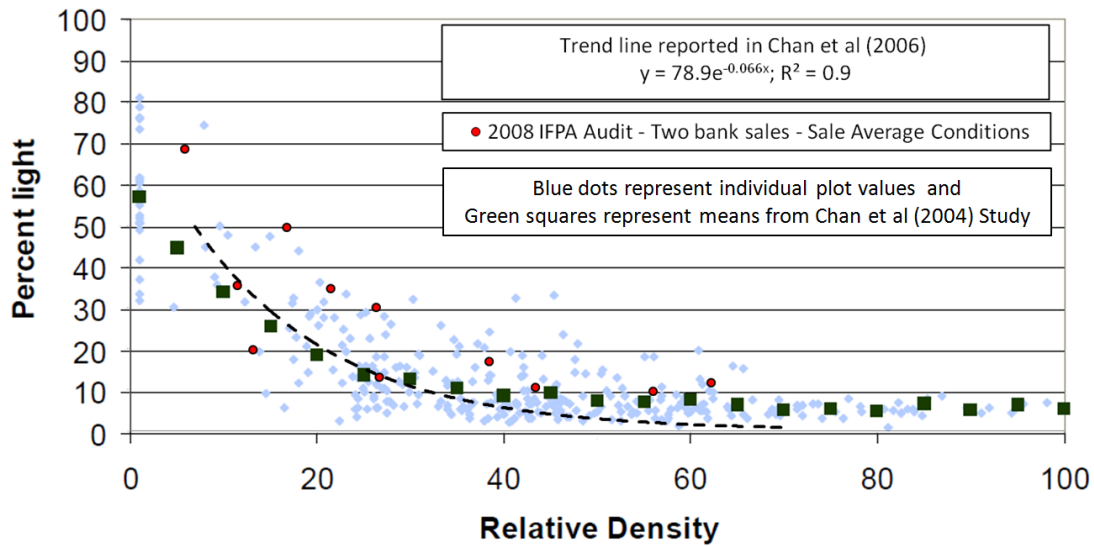


Figure 0-4: The association between relative density and percent skylight in forest stands.

The potential impacts of riparian thinning on stream shade were evaluated as part of the BLM Western Oregon EIS (BLM 2015) (Table 0-2). During this assessment it was determined that minimal shade loss³ resulting from proposed riparian forest thinning was a function of 1) the width of an “inner no-harvest” buffer, 2) the density of the “inner no-harvest” buffer, and 3) the amount of vegetation retained in the “outer thinned” buffer zone. For example, they reported that a 60ft wide “inner no-harvest” buffer was required when riparian pre-thinning canopy cover density conditions were 80%, and that thinning levels within the “outer thinning treatment” buffer zone needed to maintain above $\geq 50\%$ canopy cover conditions following thinning activities⁴.

Other thinning buffer configurations were modeled as part of this EIS evaluation (USEPA 2014) but were not presented in the final EIS. For example, a 40ft wide “inner no-harvest” buffer resulted in excessive stream shade loss at all initial canopy cover densities and modeled thinning levels (i.e., initial canopy cover conditions of 80%, 60%, and 40% thinned to 70%, 50%, 30%) (Table 0-3). This effort also showed that thinning outside of an 80ft wide “inner no-harvest” zone at high initial canopy cover conditions (i.e., 80%) did not result in shade loss levels greater than a targeted change threshold used in the assessment (i.e., $\leq 3\%$), but values were above this threshold when initial canopy cover levels were moderate (i.e., 60%) or low (i.e., 40%) (Table 0-4). Finally, thinning outside of a 100ft wide “inner no-harvest” zone at high and moderate initial canopy cover conditions did not result in shade loss levels greater than the targeted change threshold used in the assessment (i.e., $\leq 3\%$) (Table 0-5). Accordingly, these shade modeling results indicate that maintaining a sufficiently wide “inner no-harvest zone”, as well as limit the amount of vegetation removal within the “outer thinned” buffer zone, will ensure protection of stream temperature increases from harvest activities.

³ Groom et al 2011 determined that measurable stream temperature increases (i.e., $>0.3^{\circ}\text{C}$) were observed when stream shade levels dropped by 6% following riparian harvest activities, and the BLM utilized a 50% margin of safety to estimate a potential non-deleterious shade loss threshold (i.e., $6\% * 0.5 = 3\%$)

⁴ In this BLM assessment, the combined width of the “inner no-harvest” and “outer thinned” buffer zones were set at 150ft (i.e., site potential tree height), however as described in the text at the beginning of this Appendix, this 150ft combined distance likely would have had similar results as observed with a 120ft combined buffer width.

Table 0-2: Modeled shade loss for a 150-foot wide Riparian Reserve, with a 60-foot inner no harvest zone at various thinning intensities and initial canopy conditions (Source BLM 2014).

Scenario (Two Sided Treatments)				Stream Aspect			
				North South	NW/SE	East West	Average
Pre-harvest Condition - 80% Canopy Cover							
30 ft Clearcut	90 ft - Outer Thinning Zone 70CC	60ft - Inner Zone 80CC	Stream	1.3	1.1	0.9	1.1
30 ft Clearcut	90 ft - Outer Thinning Zone 50CC	60ft - Inner Zone 80CC	Stream	2.6	1.9	1.3	1.9
30 ft Clearcut	90 ft - Outer Thinning Zone 30CC	60ft - Inner Zone 80CC	Stream	4.4	3.0	1.6	3.0
Pre-harvest Condition - 60% Canopy Cover							
30 ft Clearcut	90 ft - Outer Thinning Zone 50CC	60ft - Inner Zone 60CC	Stream	5.7	4.9	5.6	5.4
30 ft Clearcut	90 ft - Outer Thinning Zone 30CC	60ft - Inner Zone 60CC	Stream	9.7	7.7	6.9	8.1
Pre-harvest Condition - 40% Canopy Cover							
30 ft Clearcut	90 ft - Outer Thinning Zone 30CC	60ft - Inner Zone 40CC	Stream	13.8	12.7	16.2	14.2

* Yellow highlighted boxes are greater than or equal to the 3 percent shade loss analytical threshold.

Table 0-3: Modeled shade loss for a 180 ft wide riparian buffer narrowed to 150 ft with a 40 ft Inner “non-thinned” buffer at various thinning intensities and initial canopy cover conditions⁵ (Source - USEPA 2014).

Scenario (Two Sided Treatments)	Stream Aspect			
	North South	NW/SE	East West	Average
Pre-harvest Condition - 80% Canopy Cover				
	5.3	4.9	3.3	4.5
	7.6	6.5	4.6	6.2
	11.0	8.9	6.1	8.6
Pre-harvest Condition - 60% Canopy Cover				
	14.3	13.2	12.2	13.3
	19.2	16.7	14.8	16.9
Pre-harvest Condition - 40% Canopy Cover				
	26.6	25.4	27.6	26.5

⁵ Average shade loss for 1 to 10 meter wide stream channels and highlighted values indicate levels greater than the targeted change threshold used in the assessment (i.e., $\leq 3\%$).

Table 0-4: Modeled shade loss for a 180 ft wide riparian buffer narrowed to 150 ft with an 80 ft Inner “non-thinned” buffer at various thinning intensities and initial canopy cover conditions (Source USEPA 2014).

Scenario (Two Sided Treatments)	Stream Aspect			
	North South	NW/SE	East West	Average
Pre-harvest Condition - 80% Canopy Cover				
	0.8	0.6	0.3	0.6
	1.3	0.9	0.3	0.8
	2.2	1.4	0.5	1.4
Pre-harvest Condition - 60% Canopy Cover				
	4.2	3.5	3.0	3.6
	7.7	5.5	3.3	5.5
Pre-harvest Condition - 40% Canopy Cover				
	11.7	10.5	11.5	11.3

Table 0-5: Modeled shade loss for a 180 ft wide riparian buffer narrowed to 150 ft with a 100 ft Inner “non-thinned” buffer at various thinning intensities and initial canopy cover conditions (Source USEPA 2014).

Scenario (Two Sided Treatments)	Stream Aspect			
	North South	NW/SE	East West	Average
Pre-harvest Condition - 80% Canopy Cover				
	0.4	0.2	0.1	0.2
	0.7	0.4	0.1	0.4
	1.1	0.6	0.1	0.6
Pre-harvest Condition - 60% Canopy Cover				
	2.3	1.7	1.4	1.8
	3.8	2.6	1.6	2.7
Pre-harvest Condition - 40% Canopy Cover				
	7.3	6.1	7.1	6.9

Summary

The studies presented in this literature review agree that riparian buffer width is an important factor for stream shade and stream temperature. Many studies demonstrated that a lower rate of shade loss occurs when the retained buffer widths were greater than 110 ft. One study (Cristea and Janisch 2007) reported that reference shade conditions were associated with a 120ft buffer width. Groom et al 2018 and Barnowe-Meyer et al 2021 developed a Bayesian model assessing the relationship between buffer width reductions and stream shade loss in Oregon streams: Their results indicated that a slope distances buffer width of 120 feet (110 feet horizontal distance) is required to ensure mean stream shade loss does not occur. When the reported stream temperature increase following buffer width narrowing was compared across all studies, it was found that a 120 ft buffer width is required to ensure that no stream warming occurs. For these reasons DEQ determined that a vegetation buffer width based on a slope distance of 120 feet would be sufficient in almost all cases to have no stream warming and attain the TMDL shade targets.

References

- Allen, M., and Dent, L. 2001. Shade Conditions over Forested Streams In the Blue Mountain and Coast Range Georegions of Oregon: Oregon Department of Forestry, Technical Report #13.
- Barnowe-Meyer, S., Bilby, R., Groom, J., Lunde, C., Richardson, J., Stednick, J. 2021. Review of current and proposed riparian management zone prescriptions in meeting westside Washington State anti-degradation temperature criterion” Final Report, Technical Type Np Prescription Workgroup.
- Benyahya, L., D. Caissie, M.G. Satish, and N. El-Jabi. 2012. “Long-wave radiation and the heat flux estimates within a small tributary in Catamaran Brook (New Brunswick, Canada).” *Hydrological Processes*. 26(4): 475-484.
- Beschta, R.L. and J. Weathered. 1984. “A computer model for predicting stream temperatures resulting from the management of streamside vegetation.” USDA Forest Service. WSDG-AD-00009.
- Bladon, K.D., Segura, C., Cook, N.A., Bywater-Reyes, S. Reiter, M. 2017. “A multicatchment analysis of headwater and downstream temperature effects from contemporary forest harvesting.” Research article – Wiley & sons, Ltd.
- Boyd, M. and B. Kasper. 2003. “Analytical Methods for Dynamic Open Channel Heat and Mass Transfer: Methodology for Heat Source Model Version 7.0”
- Boyd, M.S. 1996. “Heat Source: Stream, River, and Open Channel Temperature Prediction (Master's Thesis).” Oregon State University: Corvallis.
- Brazier, J.R. and G.L. Brown. 1973. Buffer strips for stream temperature control. Oregon State University: Forest Research Lab Research Paper 15.
- Bureau of Land Management (BLM). 2016. Proposed Resource Management Plan/Final Environmental Impact Statement. <https://www.blm.gov/programs/planning-and-nepa/near-you/oregon-washington/rmps-westernoregon> (see Hydrology Section, Page 369 in Chapter 3)
- Caissie, D. 2006. The thermal regime of rivers: A review. *Freshwater Biology* 51:1389–1406.
- Chan S., D. Larson, and P. Anderson. 2004. Microclimate Pattern Associated with Density Management and Riparian Buffers – An Interim Report on the Riparian Buffer Component of the Density Management Studies.
- Chan S.S., D.J. Larson, K. G. Maas-Herner, W.H. Emmingham, S. R. Johnston, and D. A. Mikowski. 2006. Overstory and understory development in thinned and underplanted Oregon Coast Range Douglas-fir stands. *Can. J. For. Res.* 36:2696-2711.
- Coble A; Frueh, W.T., Hanksworth, J., Cowan, A. 2020. Siskiyou Streamside Protections Review: Summary of Literature Review. Oregon Department of Forestry, Board of Forestry Agenda Item C, Attachment 2, September 9, 2020.
- Cowan W., T. Frueh, and M. Allen 2019. Siskiyou Streamside Protections Review: A Systematic Review on Stream Temperature, Shade, and Desired Future Condition. Oregon Department of Forestry, Board of Forestry Agenda Item 5, Attachment 5, June 5, 2019.

Cristea and Janisch 2007. Modeling the Effects of Riparian Buffer Width on Effective Shade and Stream Temperature, Washington Ecology Publication No. 07-03-028

Dent, L.F., Walsh, J.B.S., 1997. Effectiveness of riparian management areas and hardwood conversions in maintaining stream temperature. Oregon Department of Forestry, Forest Practices Technical Report 3.

DEQ (Oregon Department of Environmental Quality). 2001. "Tillamook Bay Watershed Total Maximum Daily Load (TMDL)."

DEQ (Oregon Department of Environmental Quality). 2002. "Nestucca Bay Watershed Total Maximum Daily Load (TMDL)."

DeWalle 2008. Guidelines for riparian vegetative shade restoration based upon a theoretical shaded-stream model 1. JAWRA Journal of the American Water Resources Association, 44(6), 1373-1387.

DeWalle 2010. Modeling stream shade: Riparian buffer height and density as important as buffer width 1. JAWRA Journal of the American Water Resources Association, 46(2), 323-333.

Ehinger W.J., Bretherton, W.D., Estrella, S.M., Stewart, G., Schuet-Hames, D.E., Nelson, S.A. 2021. "Effectiveness of Forest Practices Buffer Prescriptions on Perennial Non-fish-bearing Streams on Marine Sedimentary Lithologies in Western Washington" Washington State Department of Natural Resources and Cooperative Monitoring Evaluation & Research. Publication number CMER 2021.08.24

Garner, G., I.A. Malcolm, J.P. Sadler, and D.M. Hannah. 2014. What causes cooling water temperature gradients in a forested stream reach? Hydrology and Earth System Sciences 18:5361-5376

Gomi, T., Moore, R.D., Dhakal, A.S., 2006. "Headwater stream temperature response to clear-cut harvesting with different riparian treatments, coastal British Columbia" Water Resources Research. 42(8):,

Groom, J.D., Dent, L., Madsen, L.J., Fleuret, J. 2011. "Response of western Oregon (USA) stream temperatures to contemporary forest management." Journal of Forest Ecology and Management – Elsevier.

Groom, J.D., L., Madsen, Jones, J.E., Giovanini, J.N. 2018. "Informing changes to riparian forestry rules with a Bayesian hierarchical model" Forest Ecology and Management, 419, 17-30.

Hannah, D.M., I.A. Malcom, C. Soulsby, and A.F. Youngson. 2008. "A comparison of forest and moorland stream microclimate, heat exchanges and thermal dynamics." Hydrological Processes. 22(7):919-940.

Idaho Department of Interior/ Idaho Department of Environmental Quality 2008. Idaho Forest Practices Act Audit.

Janisch, J.E., Wondzell, S.M., Ehinger, W.J. 2012. "Headwater stream temperature: Interpreting response after logging, with and without riparian buffers, Washington, USA" Journal of Forest and Ecology Management – Elsevier.

Jobson, H.E. and T.N. Keefer. 1979. "Modeling highly transient flow, mass and heat transfer in the Chattahoochee River near Atlanta, Georgia." Geological Survey Professional Paper 1136. U.S. Gov. Printing Office, Washington D.C.

- Johnson S.L. 2004. "Factors influencing stream temperature in small streams: substrate effects and a shading experiment." *Canadian Journal of Fish and Aquatic Sciences*. 61(6):913-923.
- Kreutzweiser, D. P., S. S. Capell, and S.B. Holmes. 2009. Stream temperature responses to partial-harvest logging in riparian buffers of boreal mixed wood forest watersheds. *Canadian Journal of Forest Research* 39:497–506.
- Li, G., Jackson, C.R., Kraseski, K.A. 2012. "Modeled riparian stream shading: Agreement with field measurements and sensitivity to riparian conditions" *Journal of Hydrology*. 428-429: 142-151.
- Leinenbach, P., McFadden, G., Torgersen, C. 2013. "II. Effects of Riparian Management Strategies on Stream Temperature" Science Review Team Temperature Subgroup. U.S. Environmental Protection Agency, Seattle, WA. U.S. Geological Survey, Seattle, WA. Bureau of Land Management, Portland, OR.
- Macdonald, J.S., E.A. MacIsaac, and H.E. Herunter. 2003. The effect of variable-retention riparian buffer zones on water temperatures in small headwater streams in sub-boreal forest ecosystems of British Columbia. *Canadian Journal of Forest Research* 33(8): 1371–1382.
- Mellina. E., R.D. Moore, S.G. Hinch, J. S. Macdonald. 2002. Stream temperature responses to clearcut logging in British Columbia: the moderating influences of groundwater and headwater lakes. *Canadian Journal of Fisheries and Aquatic Sciences* 59:1886–1900.
- McIntyre, A.P. Hayes, M.P., Ehinger, W.J., Estrella, S.M., Schuett-Hames, D.E., Ojala-Barbour, R., Greg Stewart G., and Quinn, T. 2018. "Effectiveness of Experimental Riparian Buffers on Perennial Non-fish-bearing Streams on Competent Lithologies in Western Washington" Washington Department of Natural Resources. CMER #18-100.
- Meeus, J.H. *Astronomical Algorithms*. 2nd Edition. Richmond Virginia: Willmann-Bell, 1998.
- Moore, R.D., Spittlehouse, D.L., Story A. 2005. "Riparian microclimate and stream temperature response to forest harvesting: a review" *Journal of American Water Resources Association*. 41:813–834.
- Moore, R.D., Wondzell, S.M., 2005. Physical hydrology and the effects of forest harvesting in the Pacific Northwest: A review. *Journal of the American Water Resources Association* 41: 763–784.
- Newton M., Cole E.C., 2013. Stream temperature and streamside cover 14-17 years after clearcutting along small forested streams, western Oregon. *Western Journal of Applied Forestry* 28: 107–115
- ODF 2015. Data from 33 sites collected as part of the Ripstream project in Oregon (Groom et al 2011. Groom et al 2018) was used to develop a Bayesian model to estimate the stream shade and temperature response to various stream buffer configurations. Results of this modeling were presented to the Oregon Board of Forestry on several occasions in 2015. Shade model results were obtained directly from ODF staff (G. Groom) on 7/16/15.
- OWEB (Oregon Watershed Enhancement Board). 1999. "Water Quality Monitoring Technical Guide Book. Addendum Chapter 14, Stream Shade and Canopy Cover Monitoring Methods"
- Poole, G. C., and C. H. Berman. 2001. An ecological perspective on in-stream temperature: Natural heat dynamics and mechanisms of human-caused thermal degradation. *Environmental Management* 27:787-802.

Quinn, T., G.F. Wilhere, and K.L. Krueger, technical editors. 2020. Riparian Ecosystems, Volume 1: Science Synthesis and Management Implications. Habitat Program, Washington Department of Fish and Wildlife, Olympia.

Reiter, M., Johnson, S.L., Homyack, J., Jones, J.E., James, P.L. 2020. “Summer stream temperature changes following forest harvest in the headwaters of the Trask River watershed, Oregon Coast Range” Research article – Wiley & sons, Ltd.

Ringold, P.L., Van Sicke, J., Rasar, K., and Schacher, J. 2003. “Use of hemispheric imagery for estimating stream solar exposure” Journal of the American Water Resources Association. 13(6): 1373-1384.

Roon, D. A., Dunham, J. B., & Groom, J. D. 2021a. Shade, light, and stream temperature responses to riparian thinning in second-growth redwood forests of northern California. PLoS One, 16(2), e0246822.

Roon, D. A., J. B. Dunham, and C. E. Torgersen. 2021b. A riverscape approach reveals downstream propagation of stream thermal responses to riparian thinning at multiple scales. Ecosphere 12(10):e03775. 10.1002/ecs2.3775

Rutherford, J. C., Marsh, N. A. Davies, P. M. and Bunn, S. E. 2004. “Effects of patchy shade on stream water temperature: how quickly do small streams heat and cool?” Marine and Freshwater Research 55:737-748.

Schofield, K.A. and K. Sappington. 2010. “Detailed conceptual diagram for temperature.” In EPA (U.S. Environmental Protection Agency). Causal Analysis/Diagnosis Decision Information System (CADDIS) Volume II. <https://www.epa.gov/caddis-vol2/caddis-volume-2-sources-stressors-responses-temperature>

Shuett-Hames, D., Roorbach, A., Conrad, R. 2012. “results of the Westside Type N Buffer Characteristics, Integrity and Function Study Final Report” Washington State Department of Natural Resources and Cooperative Monitoring Evaluation & Research. Publication number CMER 12-1201.

Sinokrot, B.A. and H.G. Stefan. 1993. “Stream Temperature Dynamics: Measurements and Modeling.” Water Resources Research. 29(7), 2299-2312.

Solar Pathfinder. 2016. “Instruction Manual for the Solar Pathfinder Unit. Item number: PF, and PF-TC” <https://www.solarpathfinder.com/pdf/pathfinder-manual.pdf>

Sridhar, V., Sansone, A. L., LaMarche, J., Dubin, T., & Lettenmaier, D. P. 2004. Prediction of Stream Temperature in Forested Watersheds. JAWRA Journal of the American Water Resources Association, 40(1), 197-213.

Steinblums, I.J., H.A. Froehlich, and J.K. Lyons. 1984. “Designing stable buffer strips for stream protection” Journal of Forestry 82(1):49-52.

U.S. EPA. 2012. USEPA Memorandum to the Idaho Department of (State) Lands (IDL) Private Lands Forest Practices Act (FPA) shade subcommittee. (<ftp://ftp.epa.gov/reg10ftp/forestry/>)

USEPA. 2014. Supplement to the November 19, 2013 document of a potential modeling approach to evaluate the effects of thinning activities on stream shade. Unpublished Report. Comments sent to BLM on August 16, 2014.

Veldhuisen, C., Couvelier, D., 2006. Summer Temperatures of Skagit Basin Headwater Streams: Results of 2001 – 2003 Monitoring.

Volpe, C.J., 2009. Effects of prescribed riparian fire in small headwater streams in the Rogue River basin, southwest Oregon. USDI-BLM agency report. Bureau of Land Management, Medford, OR.

WADOE (Washington Department of Ecology). 2019a. “Standard Operating Procedure EAP045, Version 3.0: Hemispherical Digital Photography Field Surveys” Publication number 19-03-201.


WADOE (Washington Department of Ecology). 2019b. “Standard Operating Procedure EAP046, Version 3.0: Computer Analysis of Hemispherical Digital Images Collected as Part of a TMDL or Forests and Fish Unit Technical Study” Publication number 19-03-224.

Wilkerson E., J.M. Hagan, D. Siegel, and A.A. Whitman. 2006. The Effectiveness of different buffer widths for protecting headwater stream temperature in Maine. *Forest Science* 52(3):221–231.

Wunderlich, T.E. 1972. “Heat and mass transfer between a water surface and the atmosphere.” *Water Resources Research Laboratory, Tennessee Valley Authority. Report No. 14, Norris Tennessee. Pp 4.20.*

Attachment A – Estimating Shadow Distances


Case 1: Ground has Zero Slope

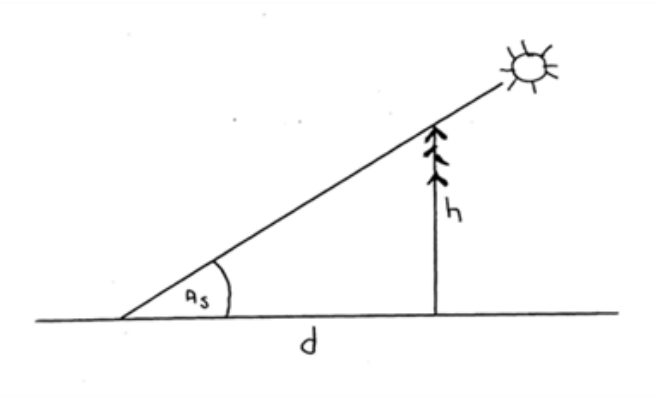

A_S = sun angle, h = tree height, and d = shadow distance

$$\tan(A_S) = \frac{h}{d} \Rightarrow d = \frac{h}{\tan(A_S)}$$

Case 2: Ground is sloped, with a slope angle = A_L and assume that the tree grows vertically

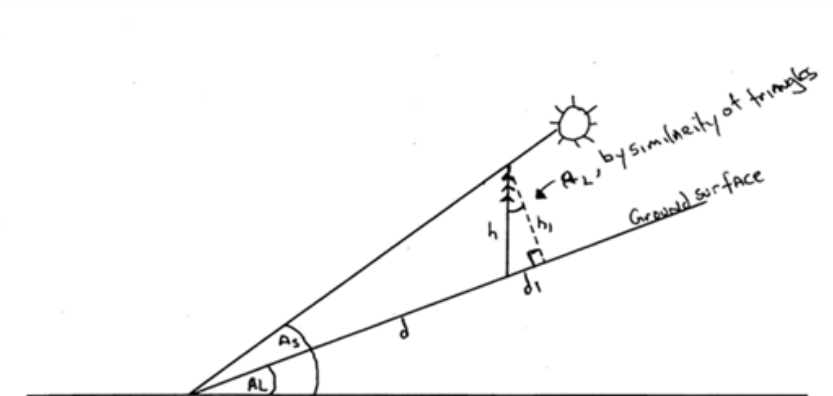

A_S = sun angle above the horizon, not the ground surface, h_1 = height of the line drawn from the tree tip, perpendicular to the ground, and d_1 = distance from interception of that line with the ground, to the base of the tree.

Using the same argument as in Case 1,

$$\tan(A_S - A_L) = \frac{h_1}{(d_1 + d)}$$

Solve for d, the shadow distance:

$$d = \frac{h_1}{\tan(A_S - A_L)} - d_1$$

Since,

$$h_1 = h * \cos(A_L) \text{ and } d_1 = h * \sin(A_L)$$

Thus,

$$d = \frac{h * \cos(A_L)}{\tan(A_S - A_L)} - h * \sin(A_L)$$

In other words,

$$\text{Shadow Length} = \frac{\text{Tree Height} * \cos(\text{Hillslope Angle})}{\tan(\text{Sun Angle} - \text{Hillslope Angle})} - \text{Tree Height} * \sin(\text{Hillslope Angle})$$

Note: When $A_L = 0$ (flat ground), this equation reduces to Case 1, because $\sin(0) = 0$, and $\cos(0) = 1$